







C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com

MLITE4-XXXXX

Ver. 1 Rel. 07/18/02

ACCESSORIES

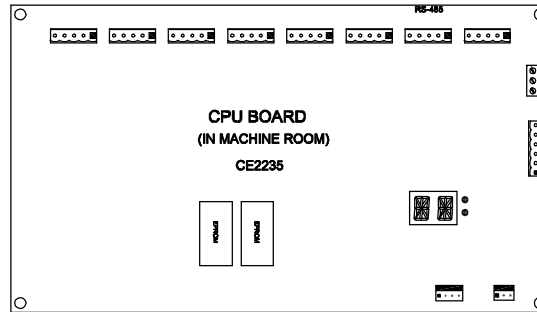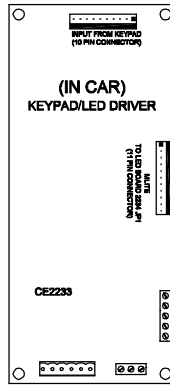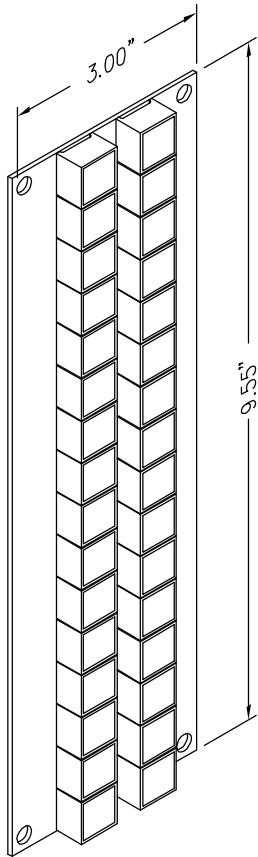


MLITE4-XXXXX LED INDICATOR DISPLAY

32 independent input status indicator. Any individual character can be displayed in virtually any font style. Unit useful for indicating hall calls. Up to 8 cards can be linked to give up to 128 up and down indicators. Up to 8 cars can be linked together for cross cancellation.

Features:

- Compact design
- Simple hookup
- 1 year factory warranty
- Serial interface from machine room to display
- CPU card control up to 8 cars
- Error correction and detection feature

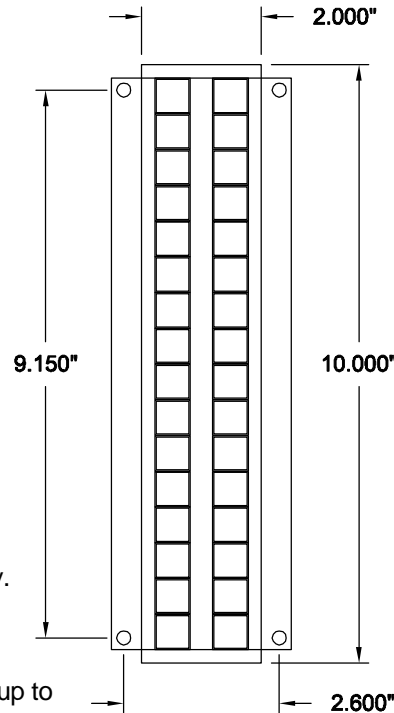

TO ORDER - SPECIFY MLITE4 - X X X X X

COLOR:

- "R" = RED
- "A" = AMBER
- "G" = GREEN

DESIRED INDICATIONS
(2-256)

SIGNAL VOLTAGE:

- "A" = POSITIVE 6-20VAC/DC, 24 VAC
- "B" = POSITIVE 24-48VDC, 48VAC
- "C" = POSITIVE 120VAC
- "D" = POSITIVE 125VDC
- "E" = NEGATIVE 6-20VDC
- "F" = NEGATIVE 24-48VDC
- "G" = NEGATIVE 125VDC

NOTE:

1. If a special voltage is required, please consult factory.
2. Consolidated cable #5756-CL recommended for RS485 link.
3. If cross cancellation is required, order M4CPU-X for up to 8 cars. Consult factory before ordering.