




MSV05-XXX

Ver. 2 Rel. 10/31/08

ACCESSORIES

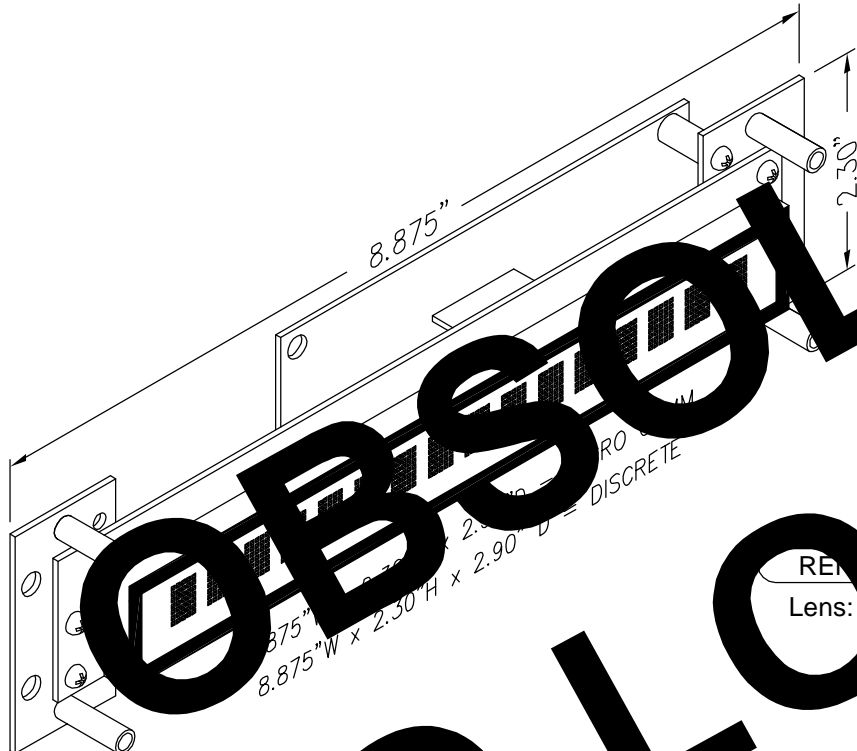

SCROLLING MESSAGE DISPLAY

Vertical scrolling message displays any alphanumeric character with a .5 inch V.F. 16 digit screen. Various messages can be selected via binary inputs or through C.E.'s Micro Comm 3 wire network. When used with Mtime-x the time, date, and temperature can be displayed as part of a message or it can be shown in a static format. The display is capable of 63 different messages (10 characters per message max). The display is capable of continuous scrolling or can be programmed to scroll and stop then flash.

Features:

- 63 messages
- Flashing
- Binary inputs
- Micro Comm inputs
- 10-150VAC/DC inputs
- Adjustable continuous scrolling rate

REMOVAL PARTS
 Lens: -600 GRAY

ORDER: - SPECIFY MSV05 - X X X

COLOR:

- "B" = BLUE
- "G" = GREEN

SIGNAL VOLTAGE:

- "A" = POSITIVE 6-20VAC/DC, 24 VAC
- "B" = POSITIVE 24-48VDC, 48VAC
- "C" = POSITIVE 120VAC
- "D" = POSITIVE 125VDC
- "E" = NEGATIVE 6-20VDC
- "F" = NEGATIVE 24-48VDC
- "G" = NEGATIVE 125VDC
- "M" = MICRO COMM

SIGNAL FORMAT:

- "1" = SINGLE LINE/FLOOR *
 - "2" = BINARY
 - "3" = UNITS & TENS *
 - "4" = GRAY CODE
 - "5" = INVERTED BINARY
 - "6" = SPECIAL
 - "M" = MICRO COMM = 2.30" DEEP
- } 2.90" DEEP

* MAY NEED ADDITIONAL DECODER CARD
 * REMOTE POWER SUPPLY

#6-32 x 1.5" STUD MIN
 (TYP. 4 PLACES)

NOTE:

1. If a special voltage is required, please contact factory.
2. To display time, date, or temperature must purchase as a system which includes MTIME and MRPOG module. A computer interface is optional.

NO LONGER AVAILABLE