




C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com

MSV30-XXXX

Ver. 4 Rel. 10/31/08

ACCESSORIES

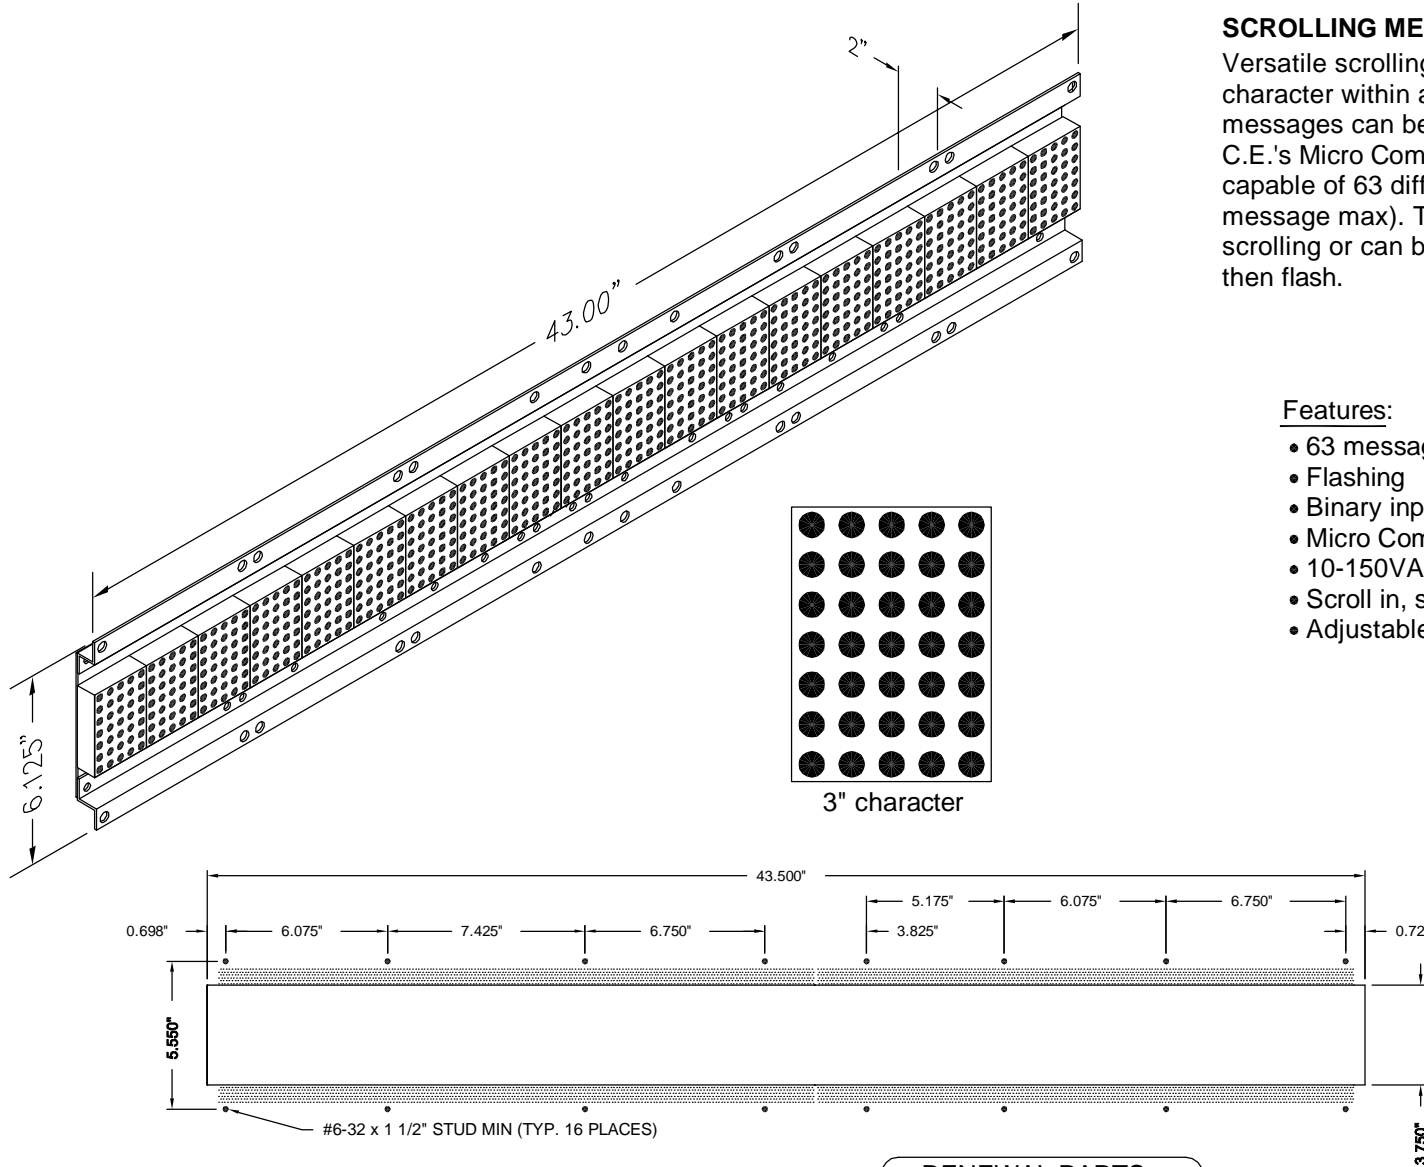

SCROLLING MESSAGE DISPLAY

Versatile scrolling message displays any alphanumeric character within a 3 inch LED 16 digit screen. Various messages can be selected via binary inputs or through C.E.'s Micro Comm 3 wire network. The display is capable of 63 different messages (119 characters per message max). The display is capable of continuous scrolling or can be programmed to scroll in and stop then flash.

Features:

- 63 messages
- Flashing
- Binary inputs
- Micro Comm inputs
- 10-150VAC/DC inputs
- Scroll in, scroll out
- Adjustable continuous scrolling rate

TO ORDER:-SPECIFY MSV30 - X X X X

COLOR:
"R" = RED

SIGNAL VOLTAGE:

- "A" = POSITIVE 6-20VAC/DC, 24 VAC
- "B" = POSITIVE 24-48VDC, 48VAC
- "C" = POSITIVE 120VAC
- "D" = POSITIVE 125VDC
- "E" = NEGATIVE 6-20VDC
- "F" = NEGATIVE 24-48VDC
- "G" = NEGATIVE 125VDC
- "M" = MICRO COMM

SIGNAL FORMAT:

- "1" = SINGLE LINE/FLOOR *
- "2" = BINARY
- "3" = UNITS & TENS *
- "4" = GRAY CODE
- "5" = INVERTED BINARY
- "6" = SPECIAL
- "M" = MICRO COMM

LENS:

- "R" = RED
- "X" = NONE

NOTE:

1. If a special voltage is required, please consult factory.
2. To display time, date, or temperature, must purchase as a system which includes MTIME-X and MRPOG module. A computer interface is optional.

RENEWAL PARTS

Lens: 104-5666 RED

* MAY NEED ADDITIONAL DECODER CARD
 * REMOTE POWER SUPPLY