




C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com

MH522-XXX


Ver. 2 Rel. 11/26/08

MICRO COMM[®]
 DISPLAYS

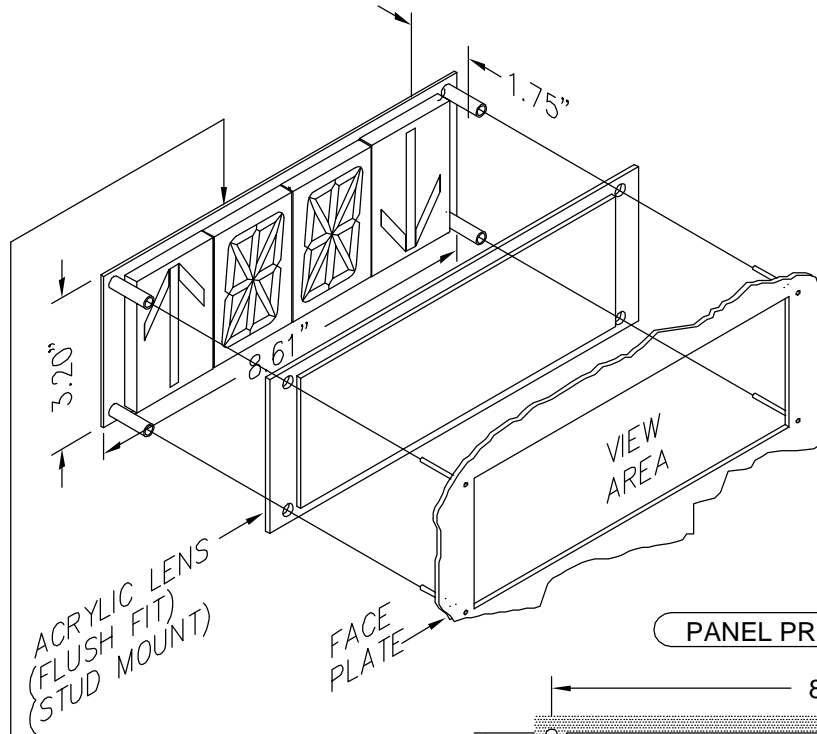


INPUT CONNECTION

PANEL PREPARATION

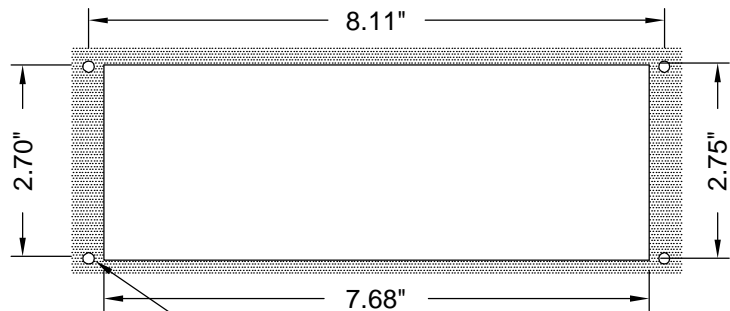

#6-32 x 1 1/2" STUD MIN
 (TYP. 4 PLACES)

CUTOUT TOLERANCE: +.020
 - 0.0

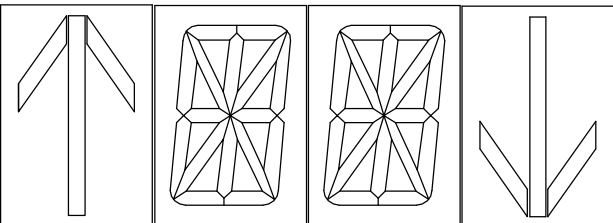

2.2" CHARACTERS
 2.5" ARROWS

NOTE:

1. This is not a stand alone unit. Must be used in conjunction with a Micro Comm interface.

REMOTE DISPLAY INDICATOR "RDI"

Segmented LED, digital indicator for floor position display, as well as car direction. Any alphanumeric character can be displayed in either single or double digit floor designations.

Typical Applications:

- Car-OP Panel
- Transom-car or Hall

Features:

- Latched inputs
- Cross wire protected
- Self testing
- Alternate message
- Passing chime output
- Error detection and correction feature
- Low Profile

RENEWAL PARTS

- Lens: 104-5614 RED
- Lens: 104-6094 GRAY

TO ORDER - SPECIFY MH522 - X X X

COLOR:

- "RR" = RED CHARACTER, RED ARROW
- "GR" = GREEN CHARACTER, RED ARROW
- "GG" = GREEN CHARACTER, GREEN ARROW
- "RG" = RED CHARACTER, GREEN ARROW
- "RB" = RED CHARACTER, GREEN UP, RED DOWN ARROWS
- "GB" = GREEN CHARACTER, GREEN UP, RED DOWN ARROWS

LENS:

- "R" = RED
- "G" = GRAY
- "X" = NO LENS