




C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com

EH110-XXXXX

Ver. 4 Rel. 02/09/2012


EUROPEAN
 SERIES

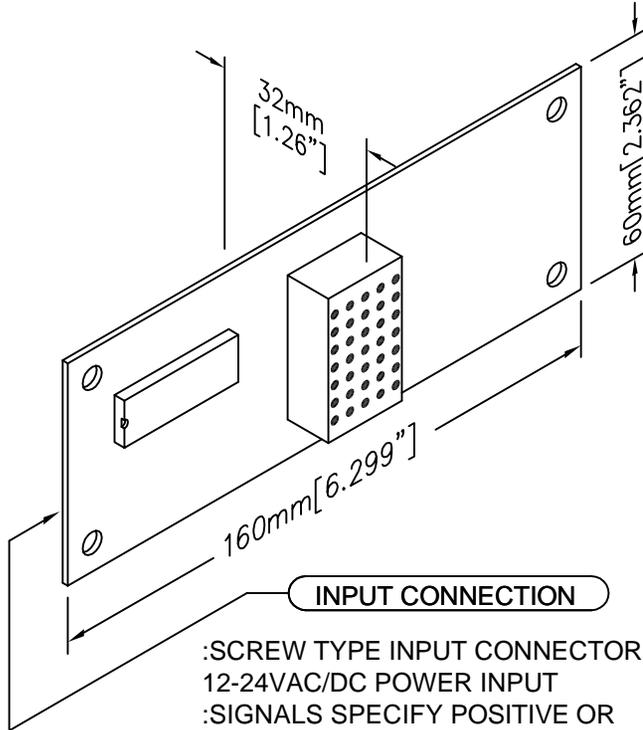

INPUT CONNECTION

:SCREW TYPE INPUT CONNECTOR
 12-24VAC/DC POWER INPUT
 :SIGNALS SPECIFY POSITIVE OR
 NEGATIVE

PANEL PREPARATION

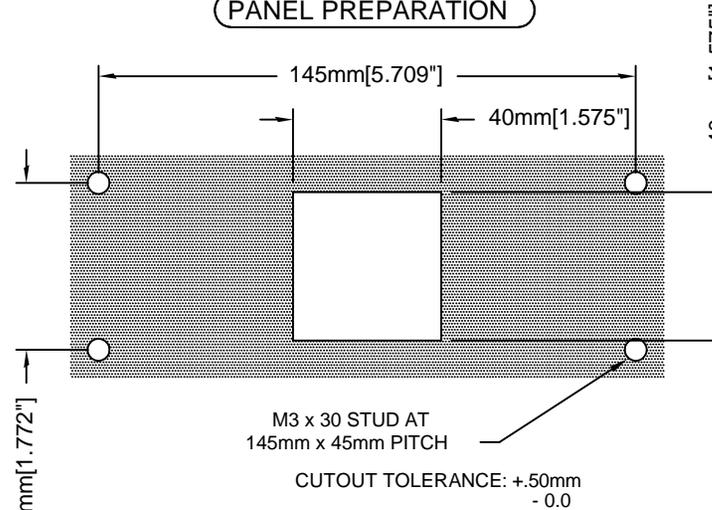

M3 x 30 STUD AT
 145mm x 45mm PITCH

CUTOUT TOLERANCE: +.50mm
 - 0.0

DOT MATRIX

Dot Matrix LED digital indicator for floor position display.
 Any alphanumeric or custom character can be displayed.

Typical Applications:


- Car-OP Panel
- Transom-car or Hall

Features:

- Low cost design
- Self contained unit
- Latched input
- Scrolling & roll over
- Hall lantern option
- Passing chime output
- Self Testing
- Message inputs
- Error detection and correction feature

RENEWAL PARTS

Lens: 104-5582 RED
 Lens: 104-6107 GRAY
 Lens: 104-9107 BLUE

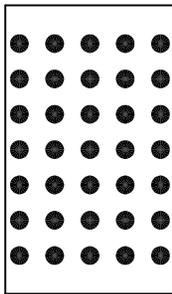

30mm [1"] CHARACTER

TO ORDER - SPECIFY EH110 - X X X X X

COLOR:

"R" = RED
 "A" = AMBER
 "G" = GREEN
 "B" = BLUE
 "W" = WHITE

LENS:

"R" = RED
 "G" = GRAY
 "B" = BLUE
 "X" = NO LENS

NUMBER OF INPUTS:

"1" = 7 INPUTS
 "M" = MICRO COMM 3 WIRE INPUT
 "P" = MICRO COMM INPUT W/ PASSING CHIME
 "S" = BOTH DIRECT & MICRO COMM INPUT

SIGNAL VOLTAGE:

"A" = POSITIVE 6-20VDC, 6-24VAC
 "B" = POSITIVE 24-48VDC, 24-48VAC
 "C" = 120VAC
 "D" = POSITIVE 125VDC
 "E" = NEGATIVE 6-20VDC
 "F" = NEGATIVE 24-48VDC
 "G" = NEGATIVE 125VDC
 "X" = IF MICRO COMM

SIGNAL FORMAT:

"1" = SINGLE LINE/FLOOR
 "2" = BINARY
 "4" = GRAY CODE
 "6" = SPECIAL
 "X" = NO SELECTION

NOTE:

1. If a special voltage is required, please consult factory.
2. A supply of 12-24VAC/DC positive or negative is also required.