

> EA104-DX2

10.4 inch ELITE PI® PRO



ELITE PI® PRO

10.4 inch Elite PI® PRO

The MICRO COMM® Elite PI® PRO is the most flexible position indicator available. With the Elite PI® Designer software, you can PROgram your own position indicator by customizing background colors and logos, messages, and arrow styles. This system offers full network support with our ENET, giving you the ability to PROgram the screen from any computer in the building. In addition to design flexibility, the MICRO COMM® Elite PI® PRO can display floor, priority, and time-based messages.

TYPICAL APPLICATIONS:

- > Car operating panel
- > Car transom
- > Lobby

FEATURES:

- > Fully customizable and PROgrammable
- > Elite PI® software
- > Streaming video capabilities with an HDINT video encoder
- > Passing chime output
- > Self testing
- > Low profile
- > Multi-car capabilities for hallway use
- > MICRO COMM serial link input



C.E. Electronics, Inc. (US) 2107 Industrial Drive, Bryan, Ohio 43506 p: 419.636.6705 www.cееlectronics.com

C.E. Electronics, Ltd. (UK) P.O. Box 1679 Marlow, Bucks SL7 3ZG, UK p: +44 (0) 1628 487633 www.cееlectronics.co.uk





C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ceelectronics.com

EA104-DX2

Ver. 2 Rel.09/04/2024

ELITE PI[®]
PRO

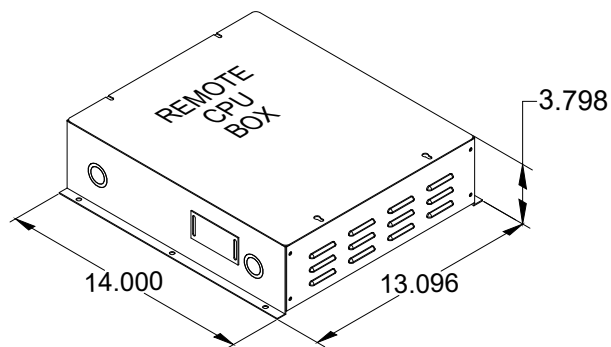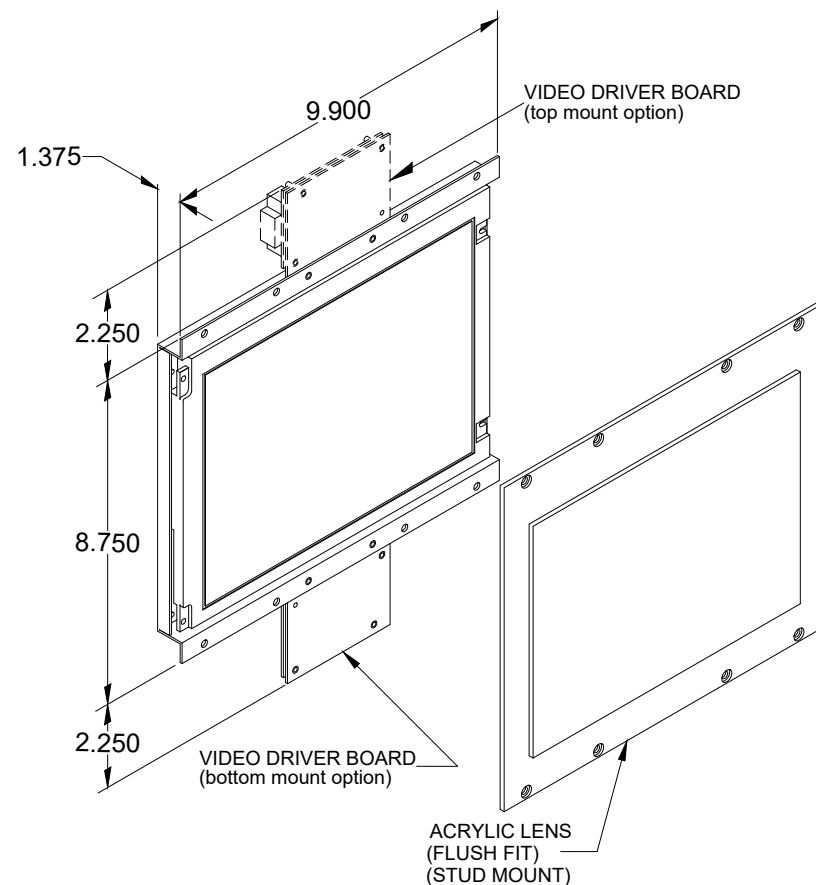

This must be used in conjunction with remote cpu ER104-XXX
Recommended clearance for display with lens is 1.50 inch.

10.4 INCH Elite PI[®] PRO


The MICRO COMM[®] Elite PI[®] PRO is the most flexible position indicator available. With the Elite PI[®] Designer software, you can PROgram your own position indicator by customizing background colors and logos, messages, and arrow styles. This system offers full network support with our ENET, giving you the ability to PROgram the screen from any computer in the building.

In addition to design flexibility, the MICRO COMM[®] Elite PI[®] PRO can display floor, priority, and time-based messages.

Typical Applications Features:

- Car-op panel
- Transom car
- Lobby

- Fully customizable and and PROgrammable
- Elite PI[®] software
- Streaming video capabilities with an HDINT video encoder
- Passing chime output
- Self testing
- Low profile
- Multi-car capabilities for hallway use
- MICRO COMM serial link input

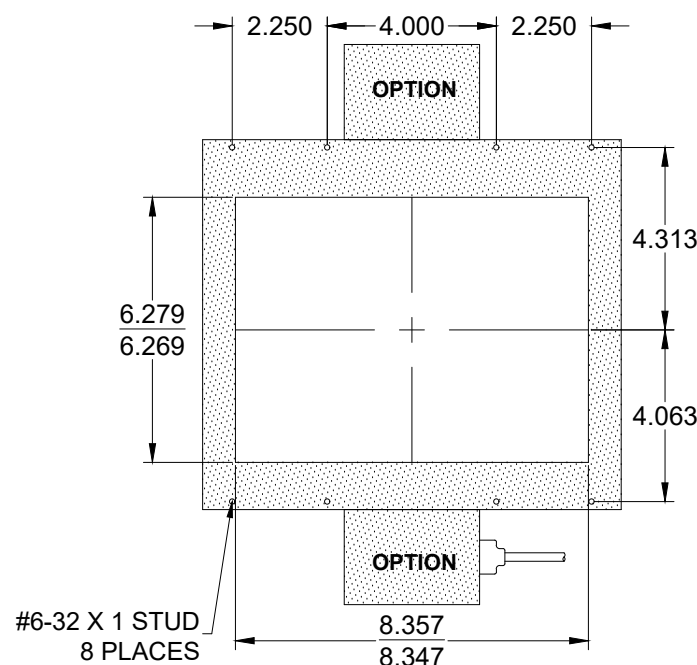

(Mounting NOT Vertically Symmetrical)


TO ORDER: - EA104 - DX2

RELATED DRAWINGS

DESCRIPTION	DRAWING NAME
PANEL PREP.	PP104-2
DETAIL DIM.	DD104-2

DD104-2


Ver. 1 Rel. 01/25/06

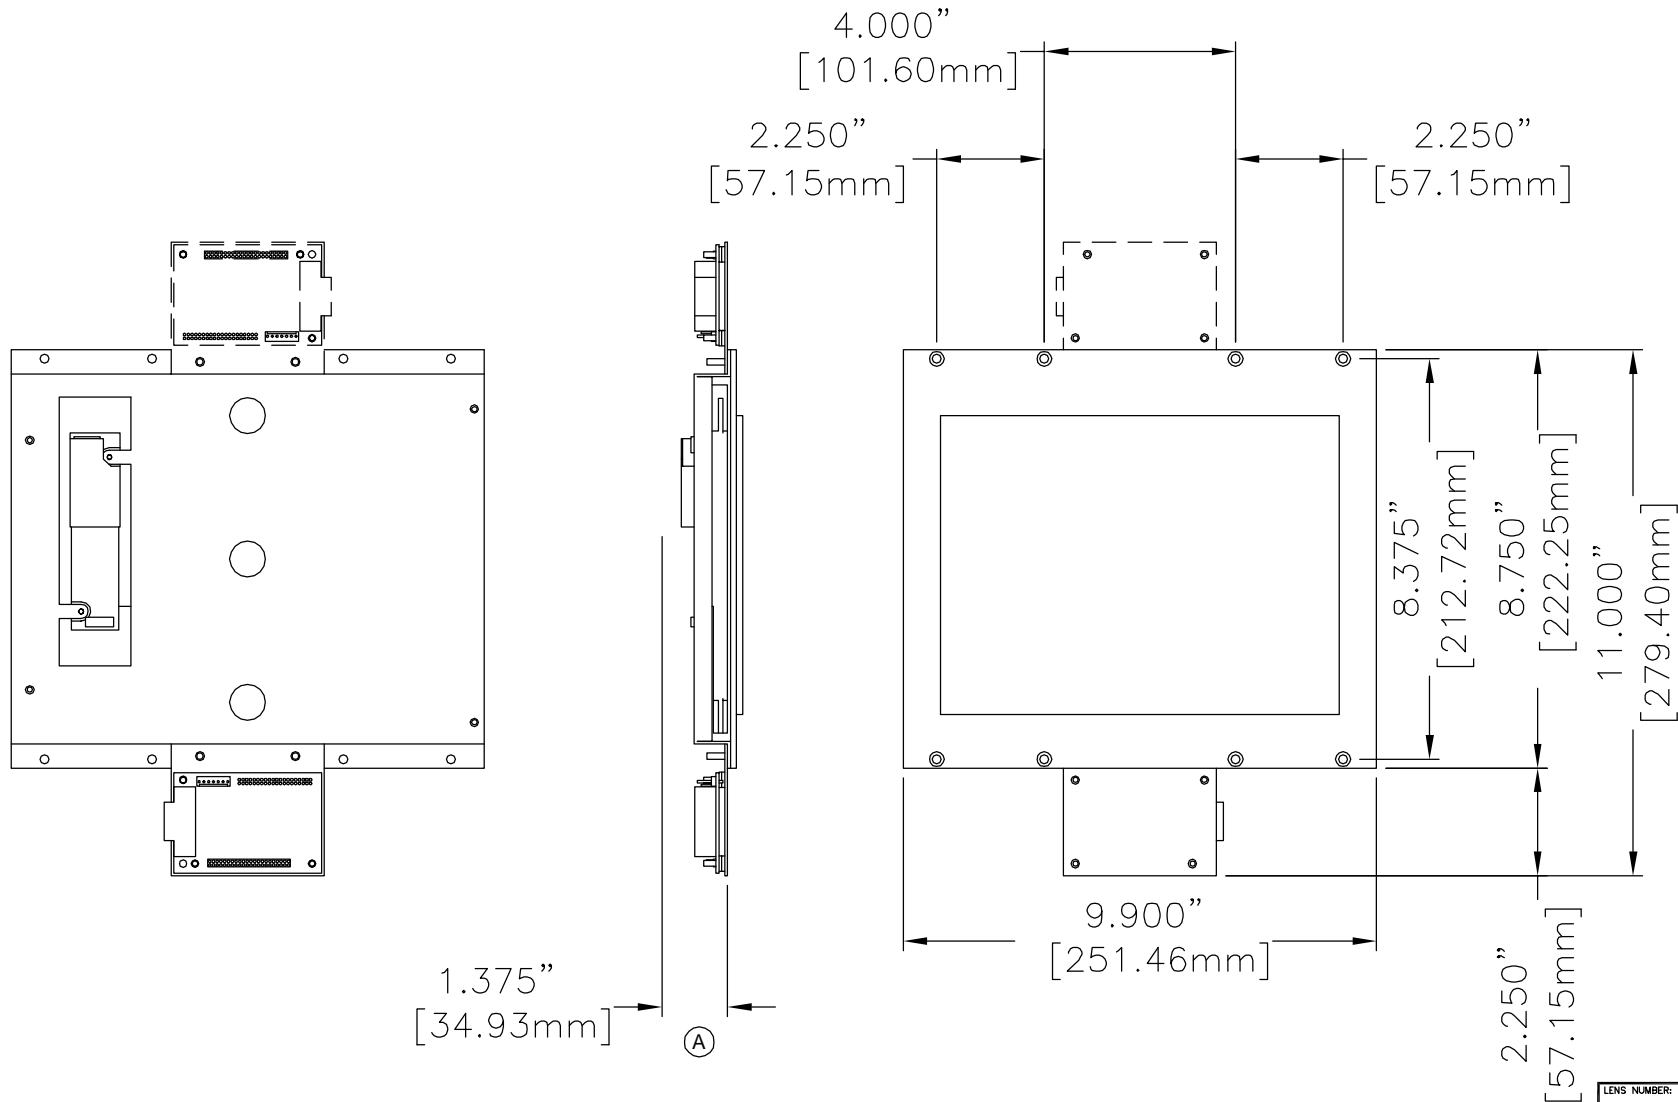

NOTES:


STANDARD 10.4 TFT UNIT:

- (A) Recommended minimum depth with basic unit of at least 1.500" [38.10mm] with a standard 1/8" step lens.

LENS NUMBER:		BOARD # & REV:	
APPROVED BY:			
Signature:			
Date:			
Company:			
DATE DRAWN:	LAST DATE REVISED	SCALE	PART #:
DRAWN BY:	TOLERANCE UNLESS OTHERWISE SPECIFIED:		 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43506 (419) 636-6705
REQUESTED BY:	TOLERANCE FOR CUTOUT (WINDOW):		
TITLE:		DWG. NO.	REV:
DD104-2			

PP104-2

Ver. 3 Rel. 1/25/2017

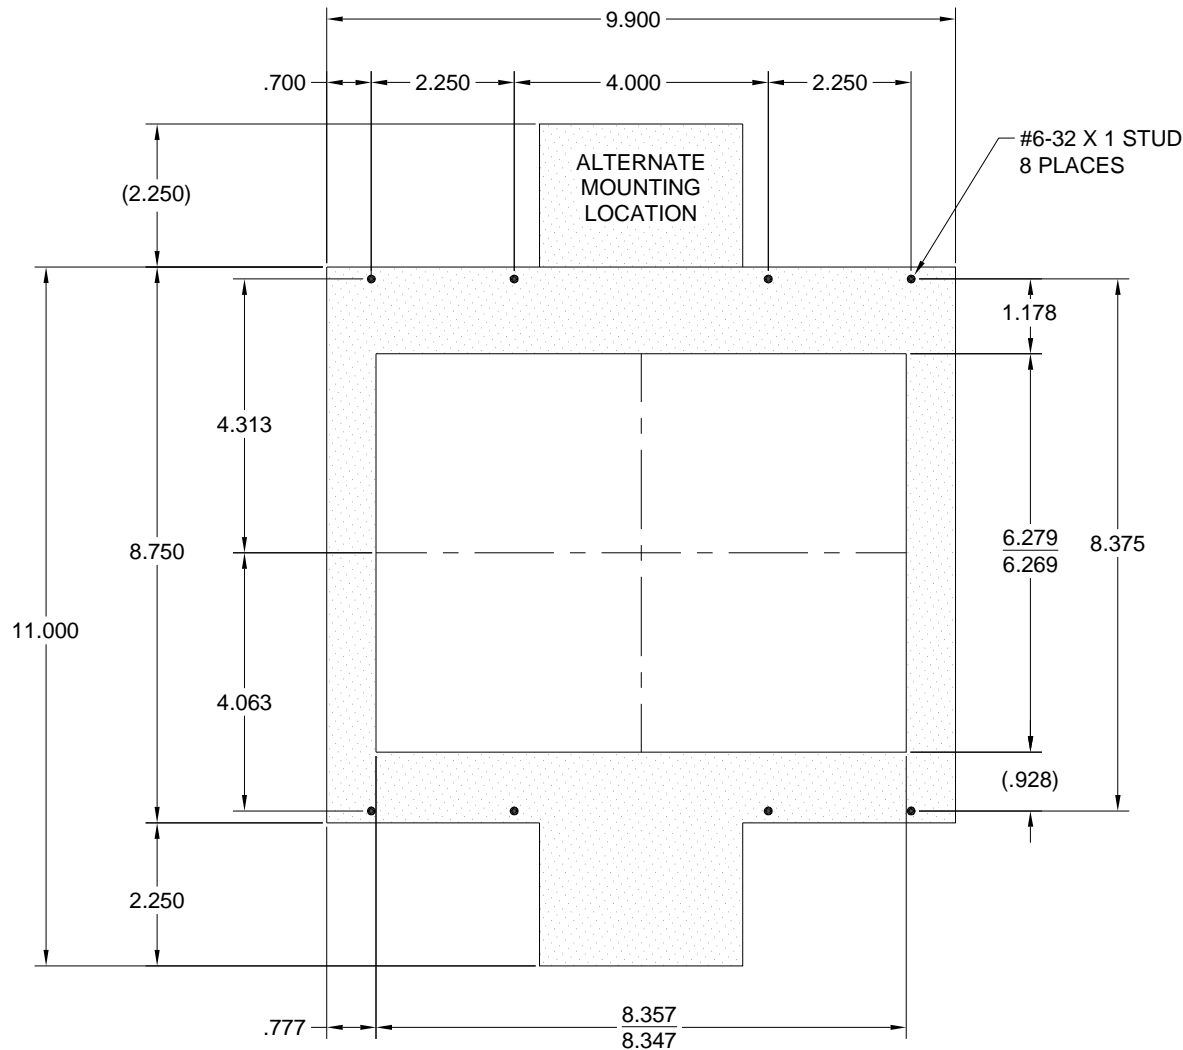

AS VIEWED FROM FRONT

LENS NUMBER:	BOARD # & REV:
APPROVED BY:	
Signature: _____	
Date: _____	
Company: _____	

DATE DRAWN: 1/04/06	LAST DATE REVISED:	SCALE NONE	PART #:
DRAWN BY: D.W.S.	TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.015		
REQUESTED BY: T.E.	TOLERANCE FOR CUTOUT (WINDOW):		
TITLE: PP104-2			REV:

C.E. ELECTRONICS, INC.
2107 Industrial Drive
Bryan, Ohio 43506
(419) 636-6705



C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.cseelectronics.com

ERXXX-LXX2

Ver. 1 Rel. 11/21/2022

ELITE PI®

REMOTE CPU BOX


This CPU Box was designed to provide outputs for auxiliary displays that can drive and assist our Elite PI's. This unit can be a solution for elevator cabs that either are having issues with a restricted space or for multi-car capabilities for hallway use. The system can be centrally located up to 25 feet from the screens. One remote CPU can drive up to 2 screens at once.

Typical Applications

- Used for visual signaling of remote LIQUID CRYSTAL DISPLAY (LCD)
- Used on car top and/or hoistway
- Operating Auxiliary screen

Features:

- Live video (optional)
- Self testing
- Elite PI Designer software
- Elite PI Transfer software
- Multi-car capabilities for hallway use
- CPU Box can be up to 25 feet from screen.
- One remote CPU box can support 2 screens
- MICRO COMM serial link input

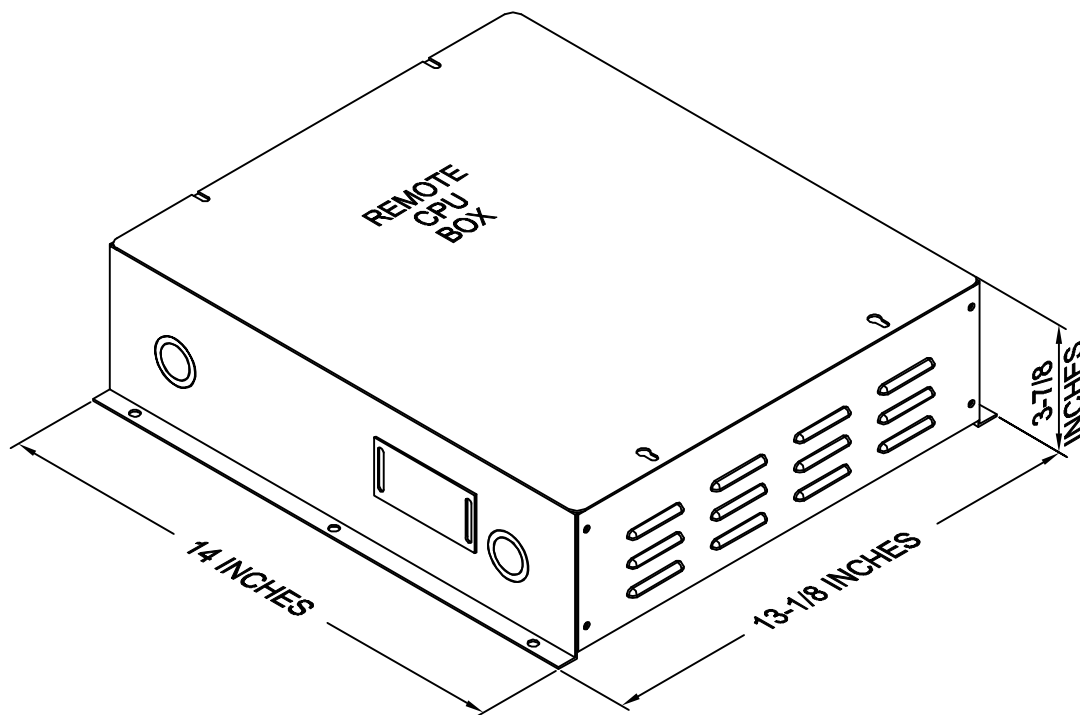

TO ORDER: - ERXXX - L X X 2

SCREEN SIZE:

"090" = 9.0
"104" = 10.4
"121" = 12.1
"150" = 15.0

SCREEN ORIENTATION:

"H" = HORIZONTAL (Landscape)
"V" = VERTICAL (Portrait)

CONFIGURED AT FACTORY