MBS200-XX FIRE KEYSWITCH OPTION





C.E. Electronics, Inc. (US) 2107 Industrial Drive, Bryan, Ohio 43506 p: 419.636.6705 www.ceelectronics.com

C.E. Electronics, Ltd. (UK) P.O. Box 1679 Marlow, Bucks SL7 3ZG, UK p: +44 (0) 1628 487633 www.ceelectronics.co.uk

SYSTEM

FIRE KEYSWITCH OPTION

The MBS200 is designed to accommodate 1-2 cars, in a single bank. A 9 inch Industrial TFT screen provides a sleek and modern single point visual status of all cars. The screen can show on screen message jewels such as: Fire Phase 1 & 2, Emergency Power, Car to Lobby, and Out of Service indications, amongst others. There is an option to add a Fireman's Jack. Keyswitch interface is through the MBS system, as opposed to being hard wired into a machine room. Typical industry standard lobby panels require multi-conductor wire pulls for each car, while the MBS Lobby Panel Series only requires a single 3-TWSP (actually requires 2-TWSP & 1 common) cable for the entire group.


TYPICAL APPLICATIONS:

- > FCC/CACF elevator control lobby panel
- > Elevator status panel
- > Remote security monitoring

FEATURES:

- ➤ Lower total system install cost
- Single 3-TWSP from MR to lobby panel
- > Pre-wired key switches
- > 4 Standard Number of Car Messages, Maximum of 8 depending on screen size, 4 for group messages
- Building Network Option Availability
- Reduced lead time-Standard Stock Panel
- >0-70°C operating temperature

System®

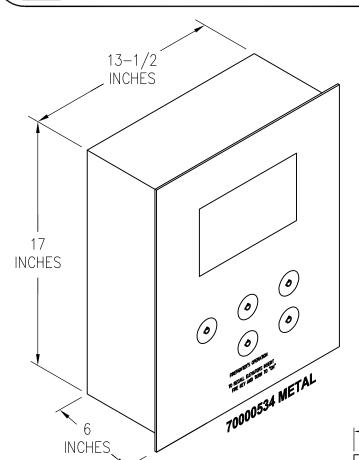

MBS200

The MBS200 is designed to accommodate 1-2 cars, in a single bank. A 9 inch Industrial TFT screen provides a sleek and modern single point visual status of all cars. The screen can show on screen message jewels such as: Fire Phase 1 & 2, Emergency Power, Car to Lobby, and Out of Service indications, amongst others. There is an option to add a Fireman's Jack. Keyswitch interface is through the MBS system, as opposed to being hard wired into a machine room. Typical industry standard lobby panels require multi-conductor wire pulls for each car, while the MBS Lobby Panel Series only requires a single 3-TWSP (actually requires 2-TWSP & 1 common) cable for the entire group.

Typical Applications

- FCC/CACF elevator control lobby panel
- Elevator status panel
- Remote security monitoring

Features:

- Lower total system install cost
- Single 3-Twisted shielded pair from machine room to lobby panel
- Pre-wired key switches
- Standard with 3 car status messages and 2 bank messages.
 Other custom messages available.
- Building Network Option Availability
- Reduced lead time- Standard Stock Panel
- 0-70° operation temperature

14-1/2 **INCHES MBS200** Fire Zone: Custom:_ ☐ Zone 1 MEDCO ☐ Zone 2 MEDCO ☐ Zone 3 MEDCO ELECTRONICS ☐ Zone 4 MEDCO 18 ☐ Zone 5 MEDCO **INCHES** ☐ Zone 6 MEDCO ☐ Zone 7 MEDCO FE0K1 **Phone Jack Option** ☐ Phone Jack □ No Phone Jack