

> NINPC-TX

EVAC ELEVATOR AUDIO, CAMERA AND DISPLAY




SECURITY

EVAC 2-WAY COMMUNICATION

This product provides an in-car interface which communicates with both the Machine Room Station and the Security Command Station over the existing network. Includes a ceiling mount camera and a 2.7 OLED display for text data. Optional upgrade to an Elite P.I. product for text data.

FEATURES:

- > Audio and Visual text communications
- > 24-30 VDC supply from car
- > Single twisted shielded pair required in traveler
- > Battery backup provided
- > Covert ceiling mount camera

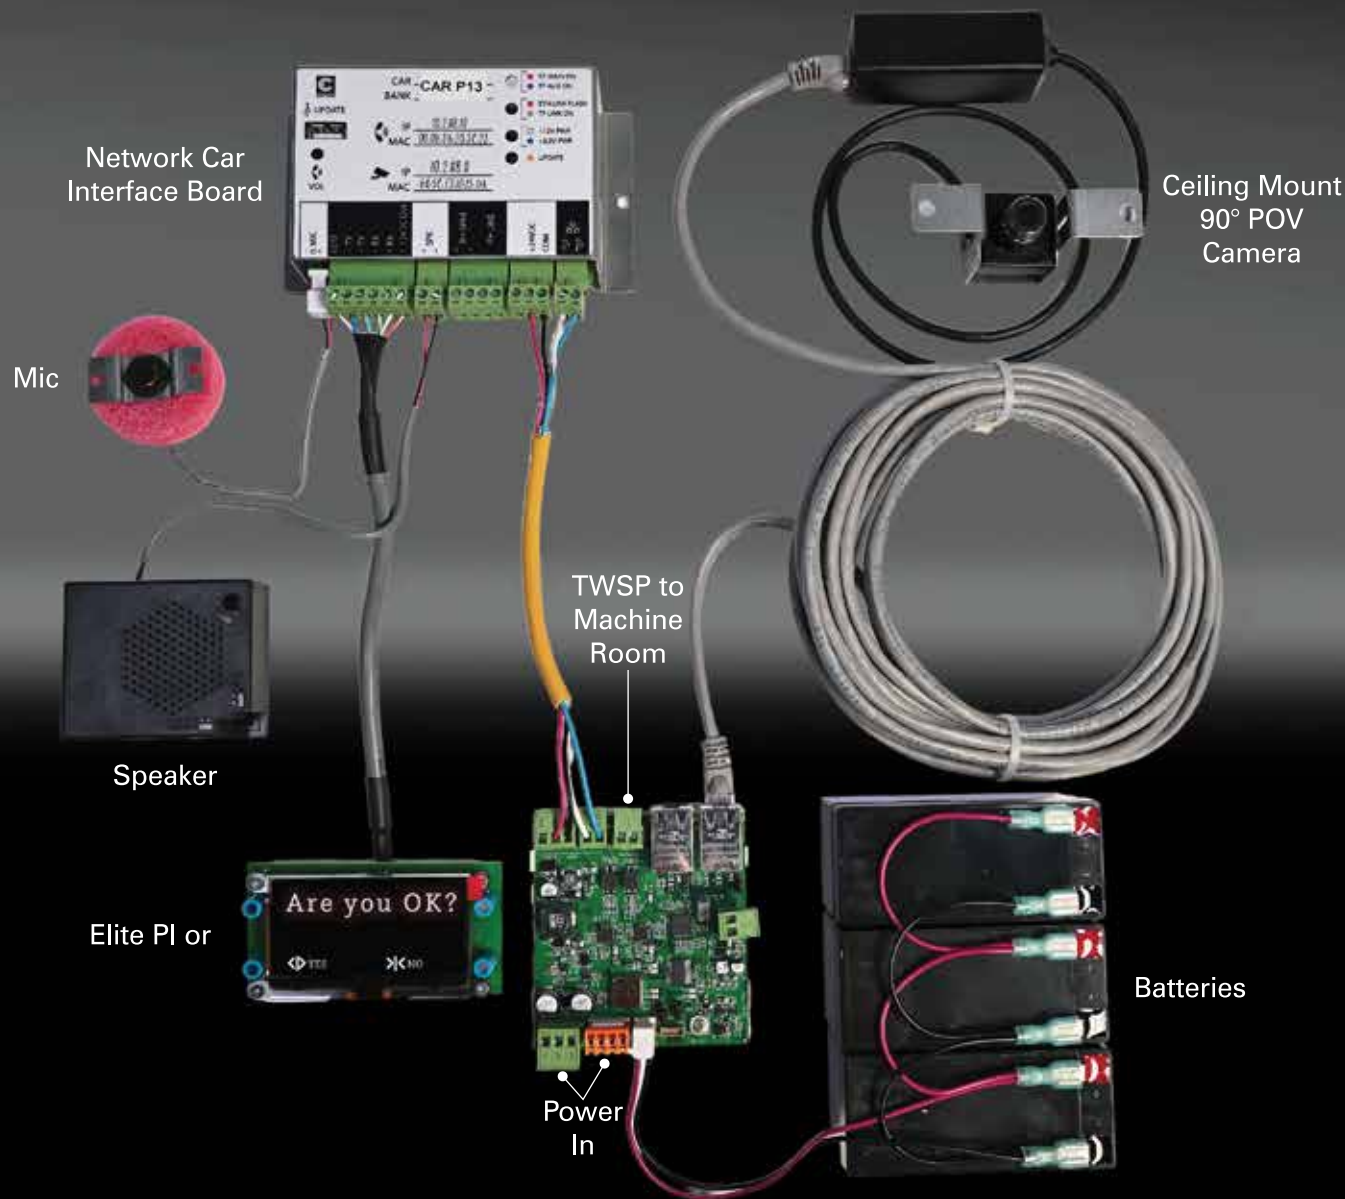

C.E. Electronics, Inc.


2107 Industrial Drive | Bryan, Ohio 43506 | Ph: (419) 636-6705 | Fx: (419) 636.2516 | www.cseelectronics.com



C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ceelectronics.com

EVAC SYSTEM

Ver. 2 Rel. 7/21/2026

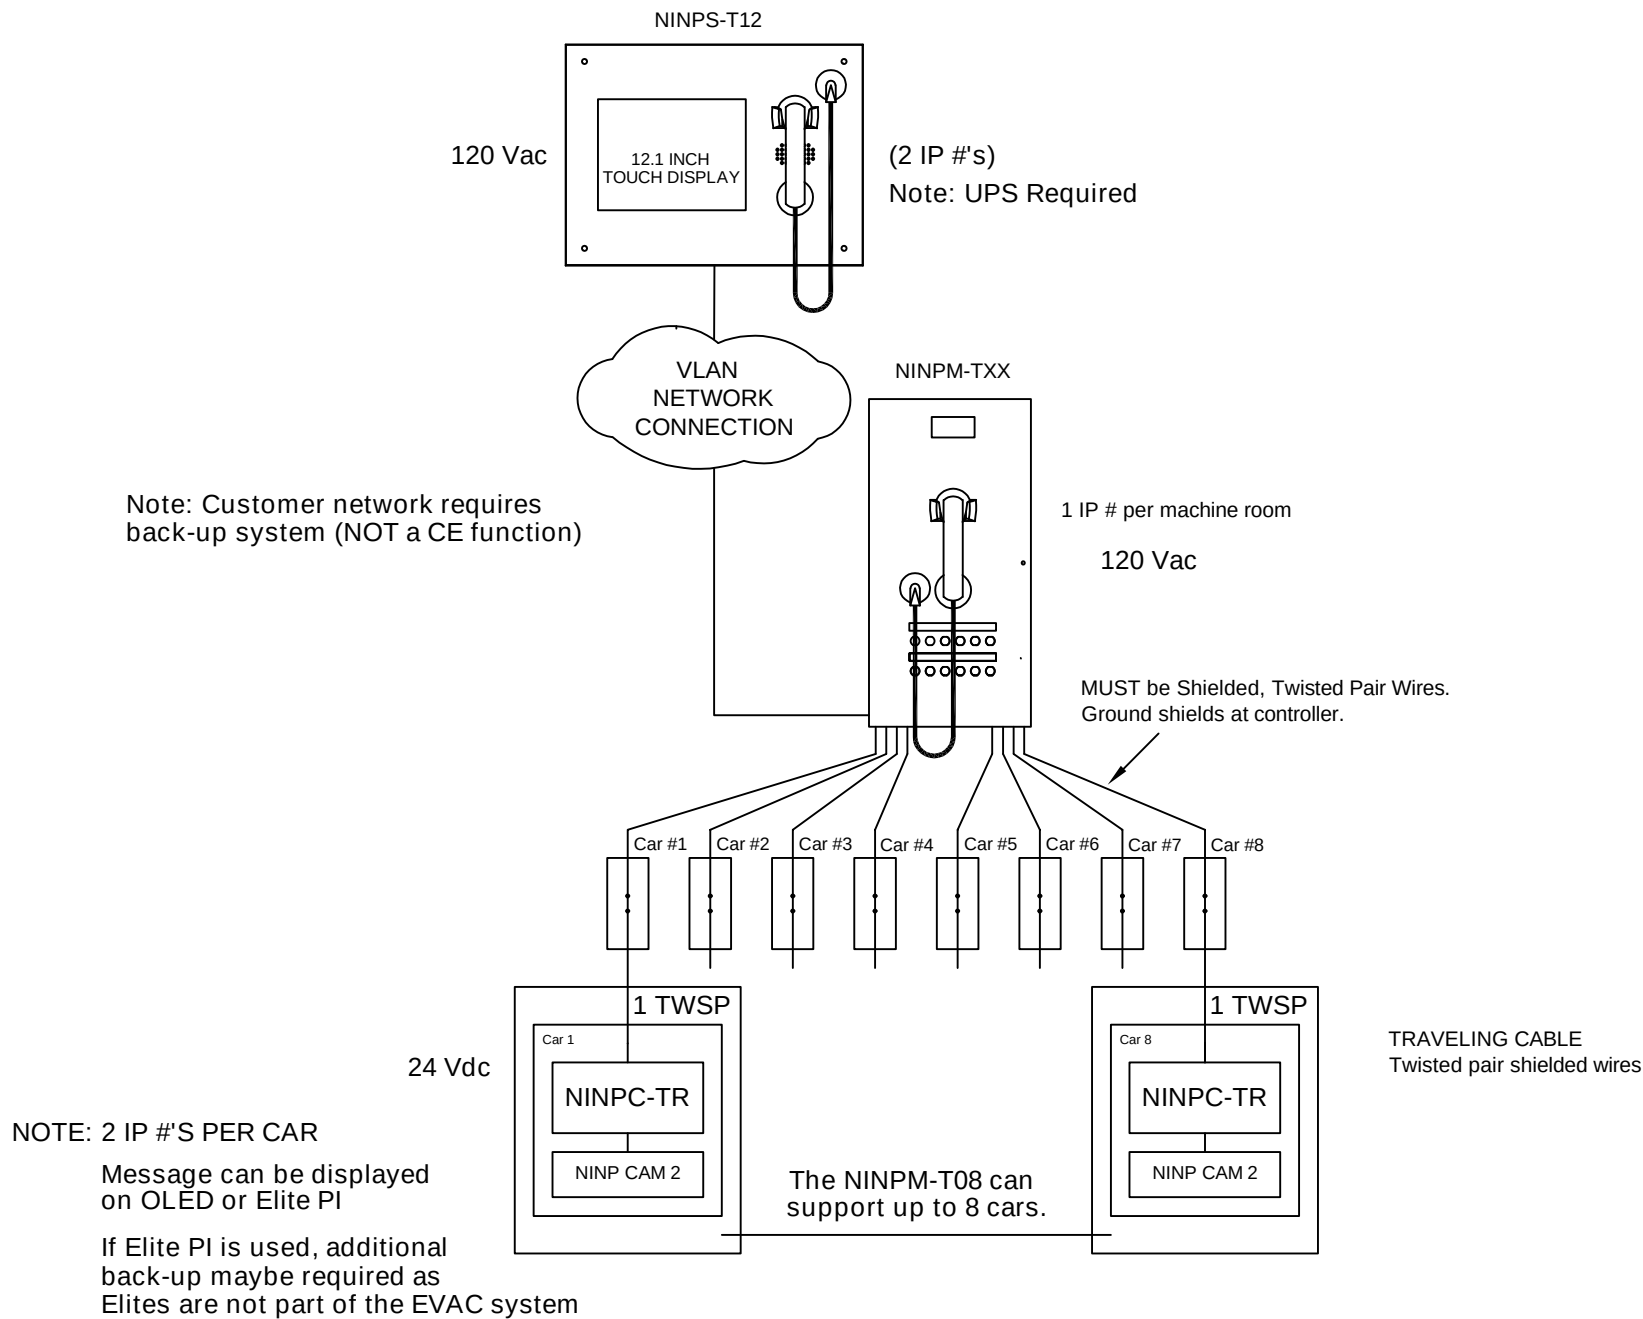




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com



NINPC-TX

Ver. 5 Rel. 1/5/2026


EVAC
2-WAY
COMMUNICATION

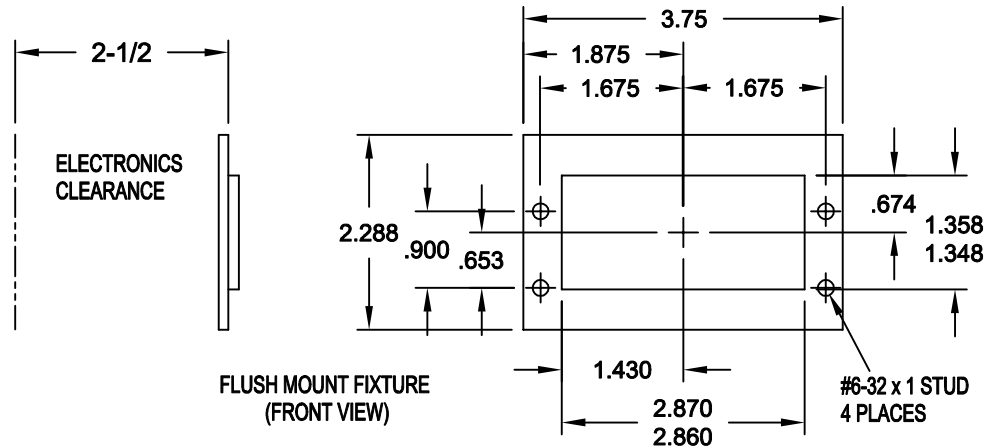

- OR -

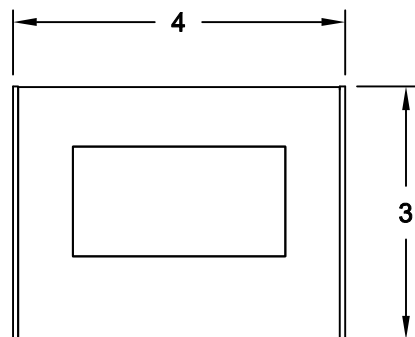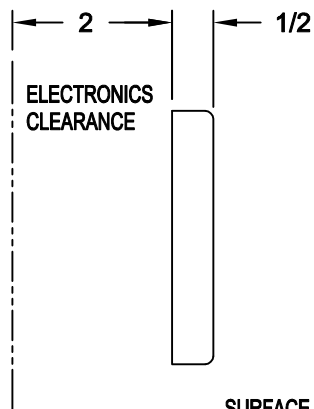


NINT-C
NETWORK CARD
INTERFACE BOARD

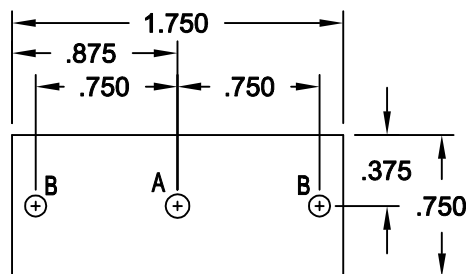

DETAIL "A"
Ø1/8 (.125) HOLE

DETAIL "B"
#4-40 x 1/2 STUD
2 PLACES

MICROPHONE ASSEMBLY
CE # 9MICASSY00
CUT OUT AND STUD
PANEL PREP DETAIL

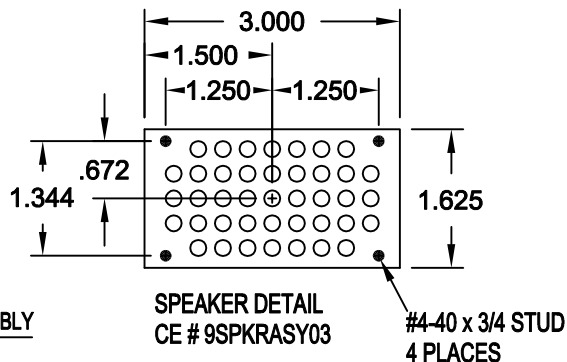

EVAC ELEVATOR AUDIO, CAMERA and DISPLAY

This product provides an in-car interface which communicates with both the Machine Room Station and the Security Command Station over the existing network. Includes a ceiling mount camera and a 2.7 OLED display for text data. Optional upgrade to an Elite P.I. product for text data.

Features:



- * Audio and Visual text communications
- * 24-30 VDC supply from car
- * Single twisted shielded pair required in traveler
- * Battery backup provided
- * Covert ceiling mount camera


To Order - NINPC-TX

"F" = Flush; 2.7 OLED Display
"R" = Remote (*) see note
"S" = Surface Mount (SS#4); 2.7 OLED Display
"X" = No Display/Interface cable to Elite PI

* Remote option works with any Mini PI, Standard PI or Elite Pro PI


Note: Speaker assembly; CE # 9SPKRASY03 mounting distance
MINIMUM 8 inches from microphone assembly; CE # 9MICASSY00

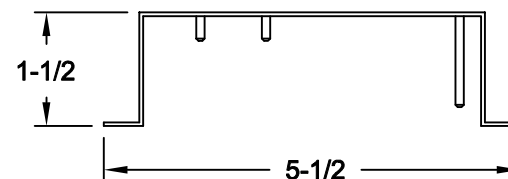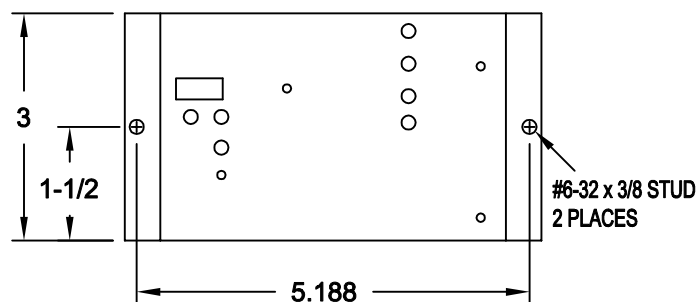

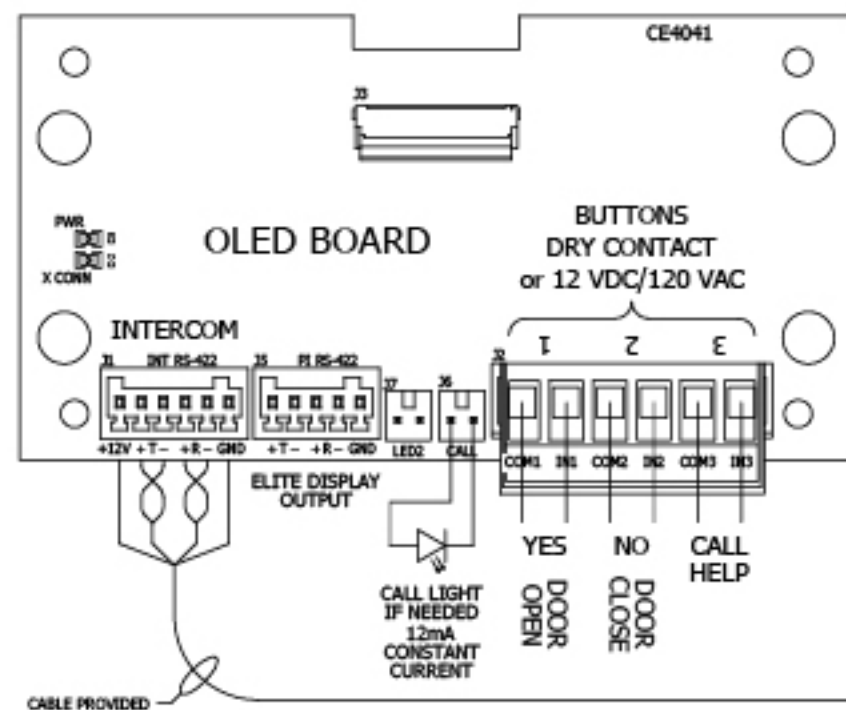


⊗ = TWISTED PAIR WIRES

NOTE:
DISTANCE BETWEEN MICROPHONE
AND SPEAKER IS EIGHT INCHES.

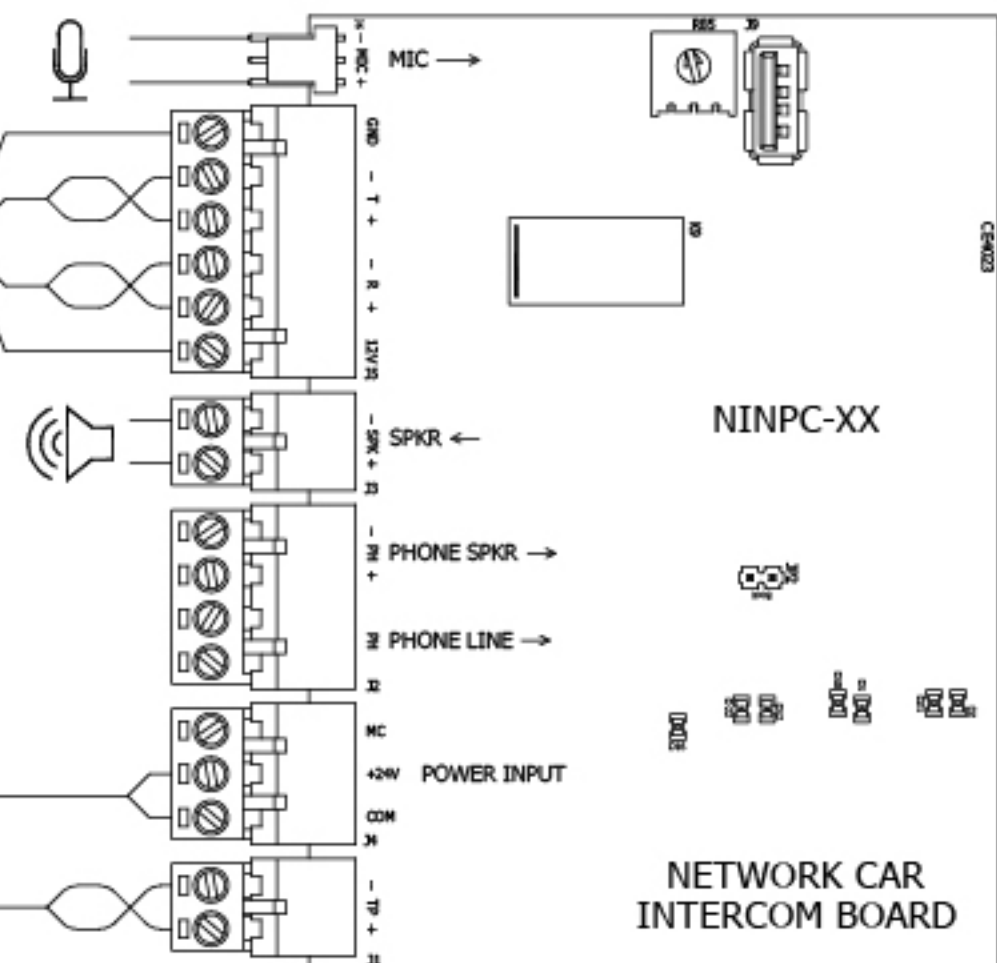

*USE THE MICRO COMM®
CONNECTOR OR THE RSL
CONNECTOR, NOT BOTH.

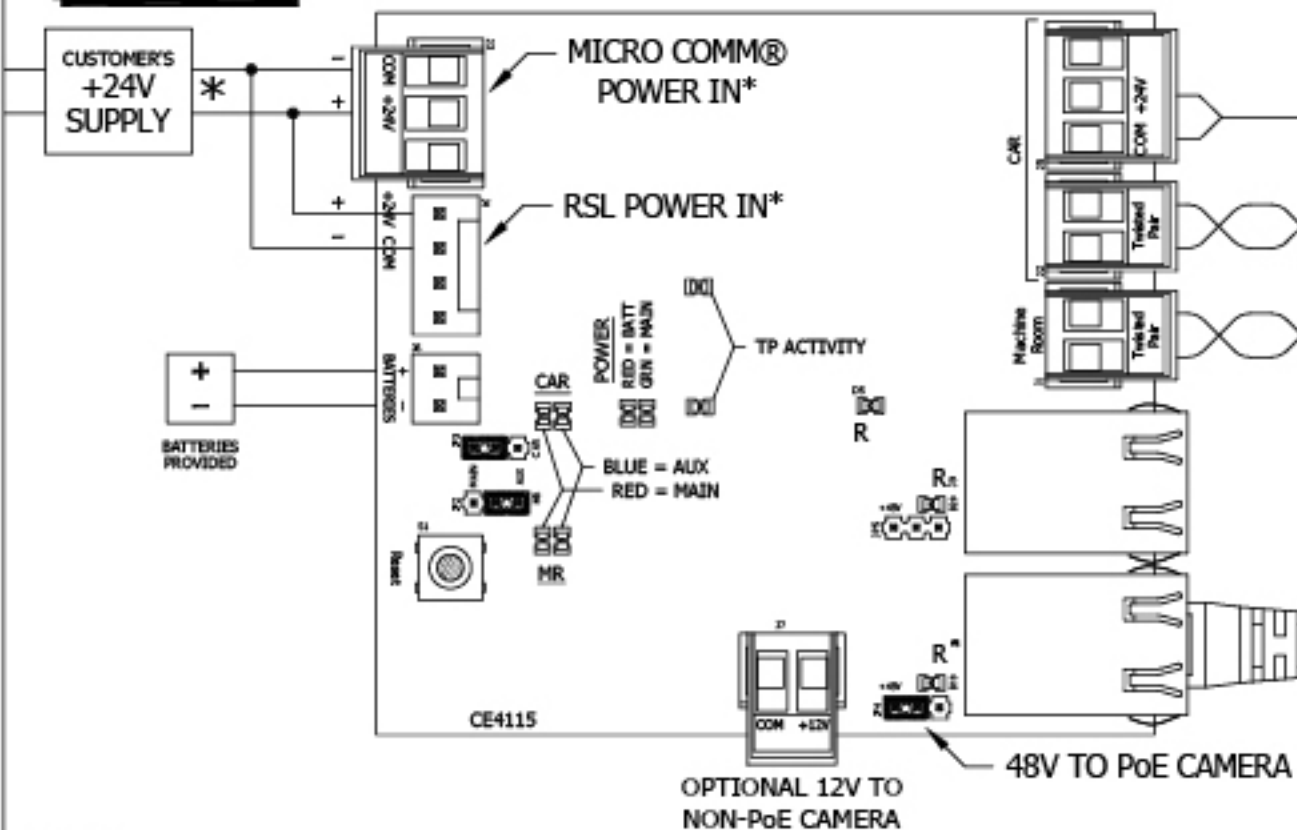

MACHINE ROOM TWISTED PAIR - CUSTOMER SUPPLIED

Traveling
Cable

DATE: 01/22/24	REVISION: DAC	APPROVED BY: JK, AM	C.E. ELECTRONICS, INC. 2187 Industrial Drive Bryan, TX 77802 (409) 636-4700	REV: E
BOARD NUMBER: -	LAST DATE REVISED: 11/04/25	APPROVED BY:		
PRODUCT: NINPC w/NINPCAM - NET INTERCOM CAR INF w/CAMERA DRAWING: NINPC_CAM_01				

EVAC 2-WAY COP

ELITE PI POSITION INDICATOR (PI)

PI NORMAL OPERATION:

Screen will display at minimum Direction Arrow and Floor Position.

2-WAY EMERGENCY CALL OPERATION, CAPABLE:

(Requires additional battery backup)

Display will change to text display "Two-Way Communication Calling for Help"

Security will answer and attempt to establish voice communication first.


If voice can't be established, security then has a choice of five standard text messages or can type message with the on screen touch keyboard.

Five Standard One Touch Texts: 1) Are You OK? 2) Do you need help? 3) Can you hear me? 4) Help is on the way. 5) Help is On-Site.

Security station screen will show Car video feed for the duration of emergency call.



Normal Operation PI

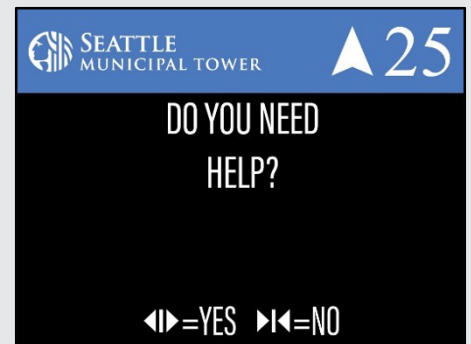

Emergency Call Display

Emergency Call is initiated by pressing the Emergency Phone Button.

Occupant presses applicable Door Open or Door Closed to answer security questions if unable to establish voice communications.



C.E. Electronics, Inc.
elevate yourself to new heights



Industrial Drive
Bryan, OH 43506



call us:
419.636.6705



web:
www.ceelectronics.com