


> NINPS-T12X

EVAC SECURITY STATION – DESKTOP / WALL MOUNT

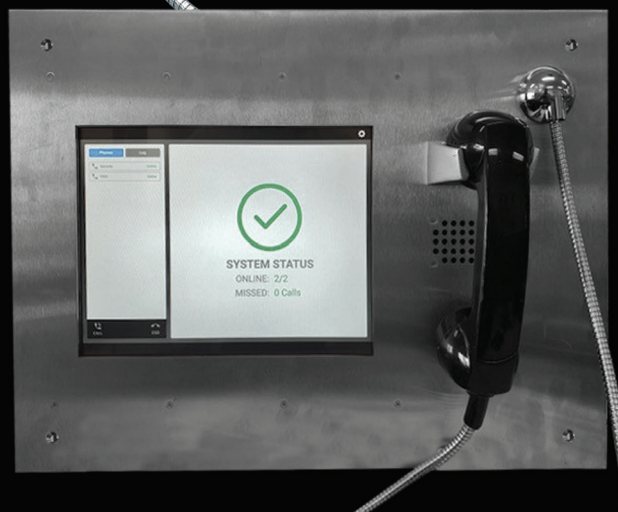

SECURITY

2 WAY NETWORK COMMUNICATION SYSTEM

This system is designed to meet the requirements for the 24/7 in house 2 way communication code 2.27.1.

System provides a 12.1" Touch Screen with Peer-to-peer Server software / interface. Network intercoms / in Ceiling Camera's, Machine Room Interfaces, Per code it provides a UPS for the Touch Screen, Battery Backup for the Intercom / Camera / OELD Unit, system supports a universal 3 button interface 12-120v / Dry Contact

TYPICAL APPLICATIONS:

- > 24/7 In House command centers
- > 24/7 Fire command centers

FEATURES:

- > Network Interface
- > Single TWSP Interface Cab to Machine Room
- > 24 volt power in car supply RSL / MICRO COMM / 24 VDC
- > PCAP 12.1 Touch Screen with UPS
- > Convert in ceiling NT Camera 1.7 / 3.6 mm with 25' Cable Interface supplied
- > 12-120v, dry contact button interface
- > OLED Display or Elite PI interface
- > UL 60950, CSA22.2 #60950



C.E. Electronics, Inc.

2107 Industrial Drive | Bryan, Ohio 43506 | Ph: (419) 636-6705 | Fx: (419) 636.2516 | www.cееlectronics.com

*Display Part Number: ET121-AKP4







C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ceelectronics.com

NINPS-T12X

Ver. 1 Rel. 6/18/2025

**2-WAY
COMMUNICATION**

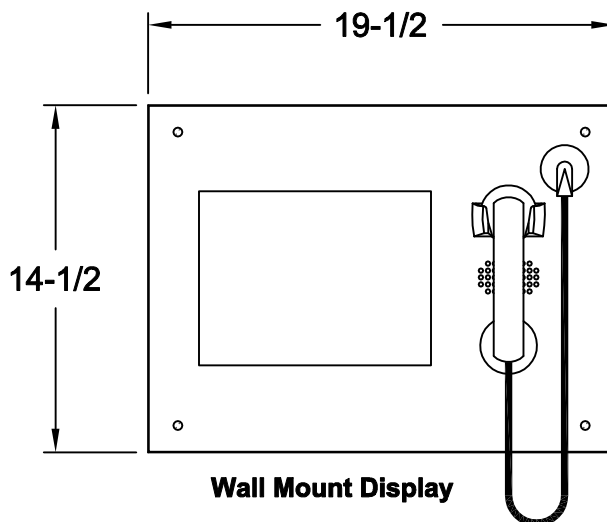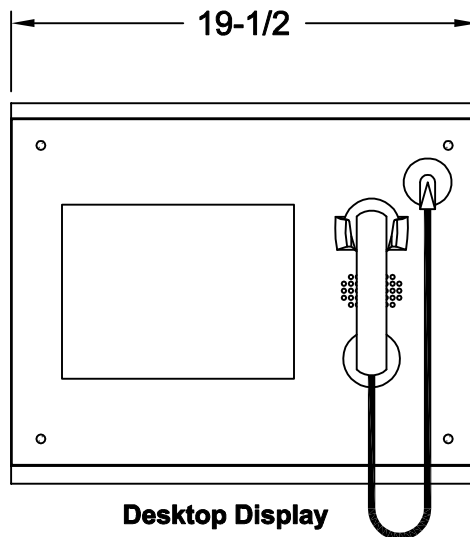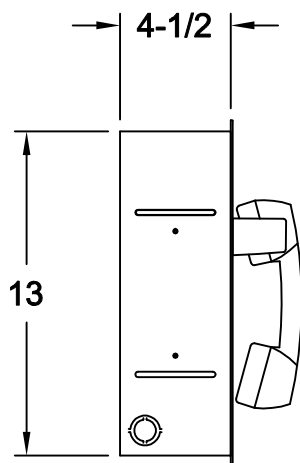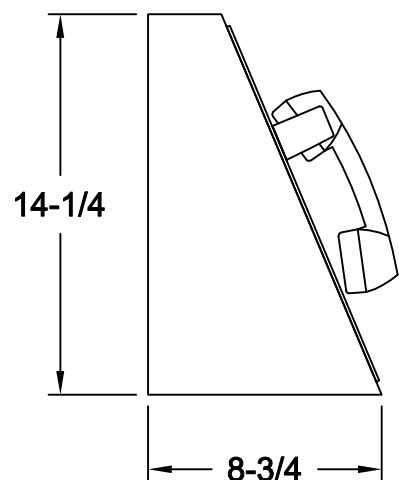

12.1 INCH TOUCH DISPLAY

This system is designed to meet the requirements for the 24/7 in house 2 way communication code 2.27.1

The system provides a 12.1 inch touch screen with peer-to-peer software plus interface with network intercoms, in-ceiling cameras and machine room interfaces

Per code, it provides a UPS battery backup for the touch screen, car intercom, camera and OLED display. The system supports a universal three (3) button interface 12V to 120V dry contact.

Typical application:

- * 24/7 in house command centers
- * 24/7 Fire command centers

Features:

- * Network Interface
- * Single TWSP interface cab to machine room
- * 24 volt power in car supply RSL/MICRO COMM/24VDC
- * PCAP 12.1 Touch Screen w/ UPS
- * Convert in ceiling NT Camera; 1.7/3.6mm with 25 foot cable
- * Interface supplied
- * 12-120v, dry contact button interface
- * OLED Display or Elite PI interface
- * UL 60950, CSA22.2 #60950

To Order - NINPS-T12X

"D" Desktop
"W" Wall Mount
"X" No Metal




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.cseelectronics.com

NINPS-T12X EVAC SYSTEM


Ver. 1 Rel. 11/11/2025

LINE
DIAGRAM

2-WAY
COMMUNICATION

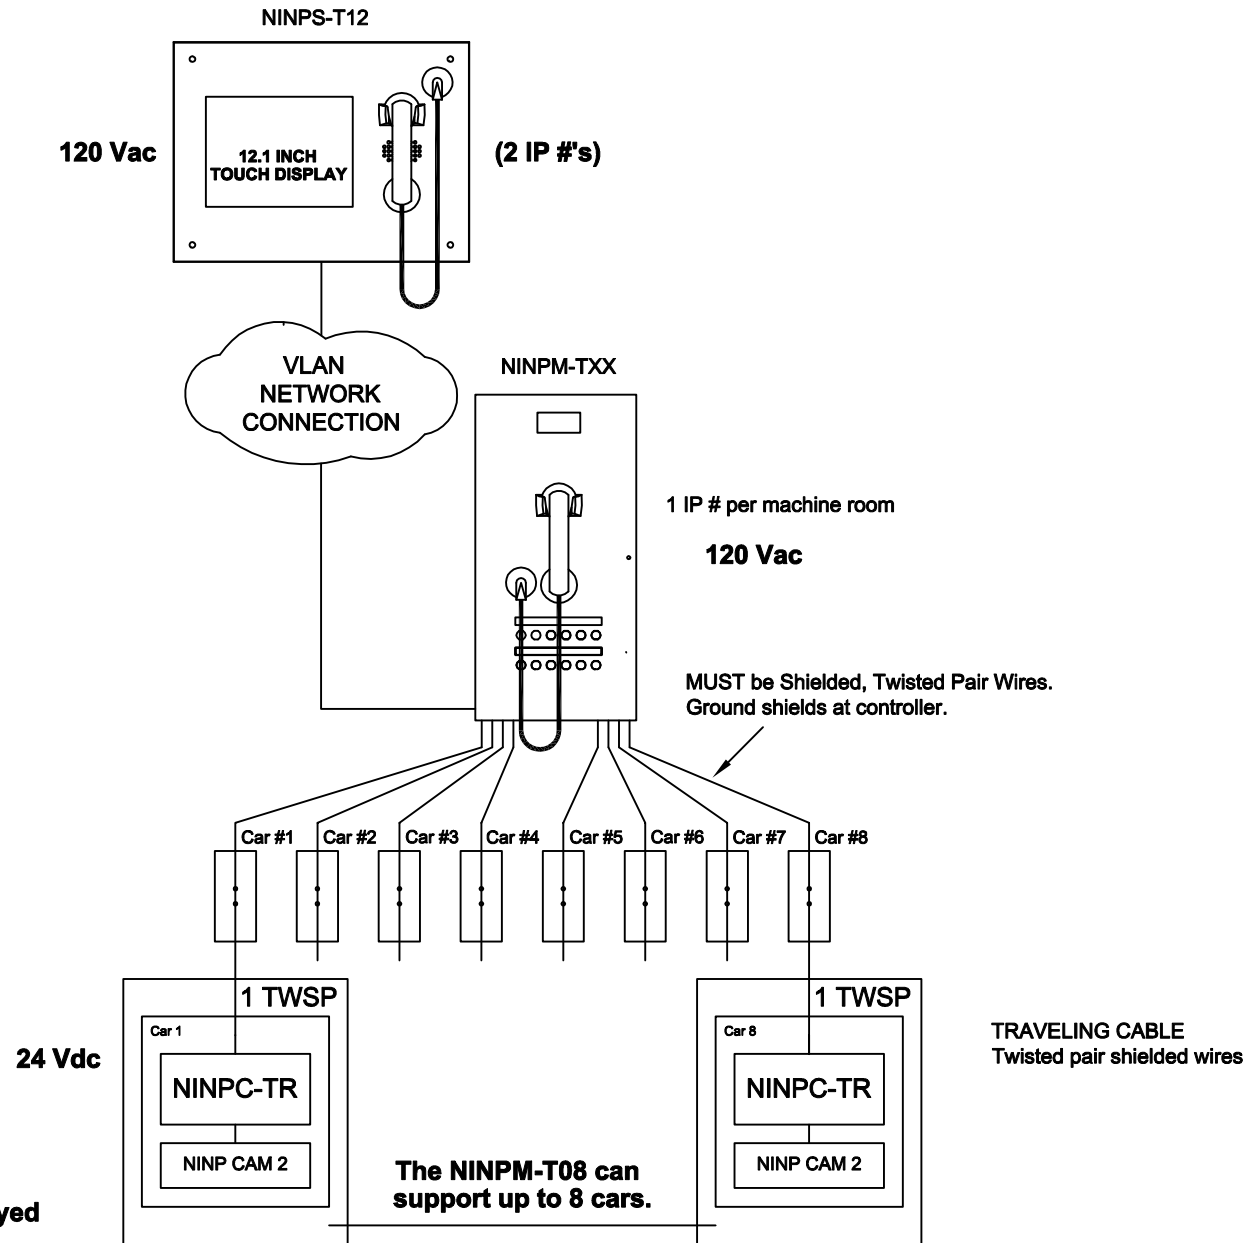

NINPS - NETWORK INTERCOM SECURITY MODULE

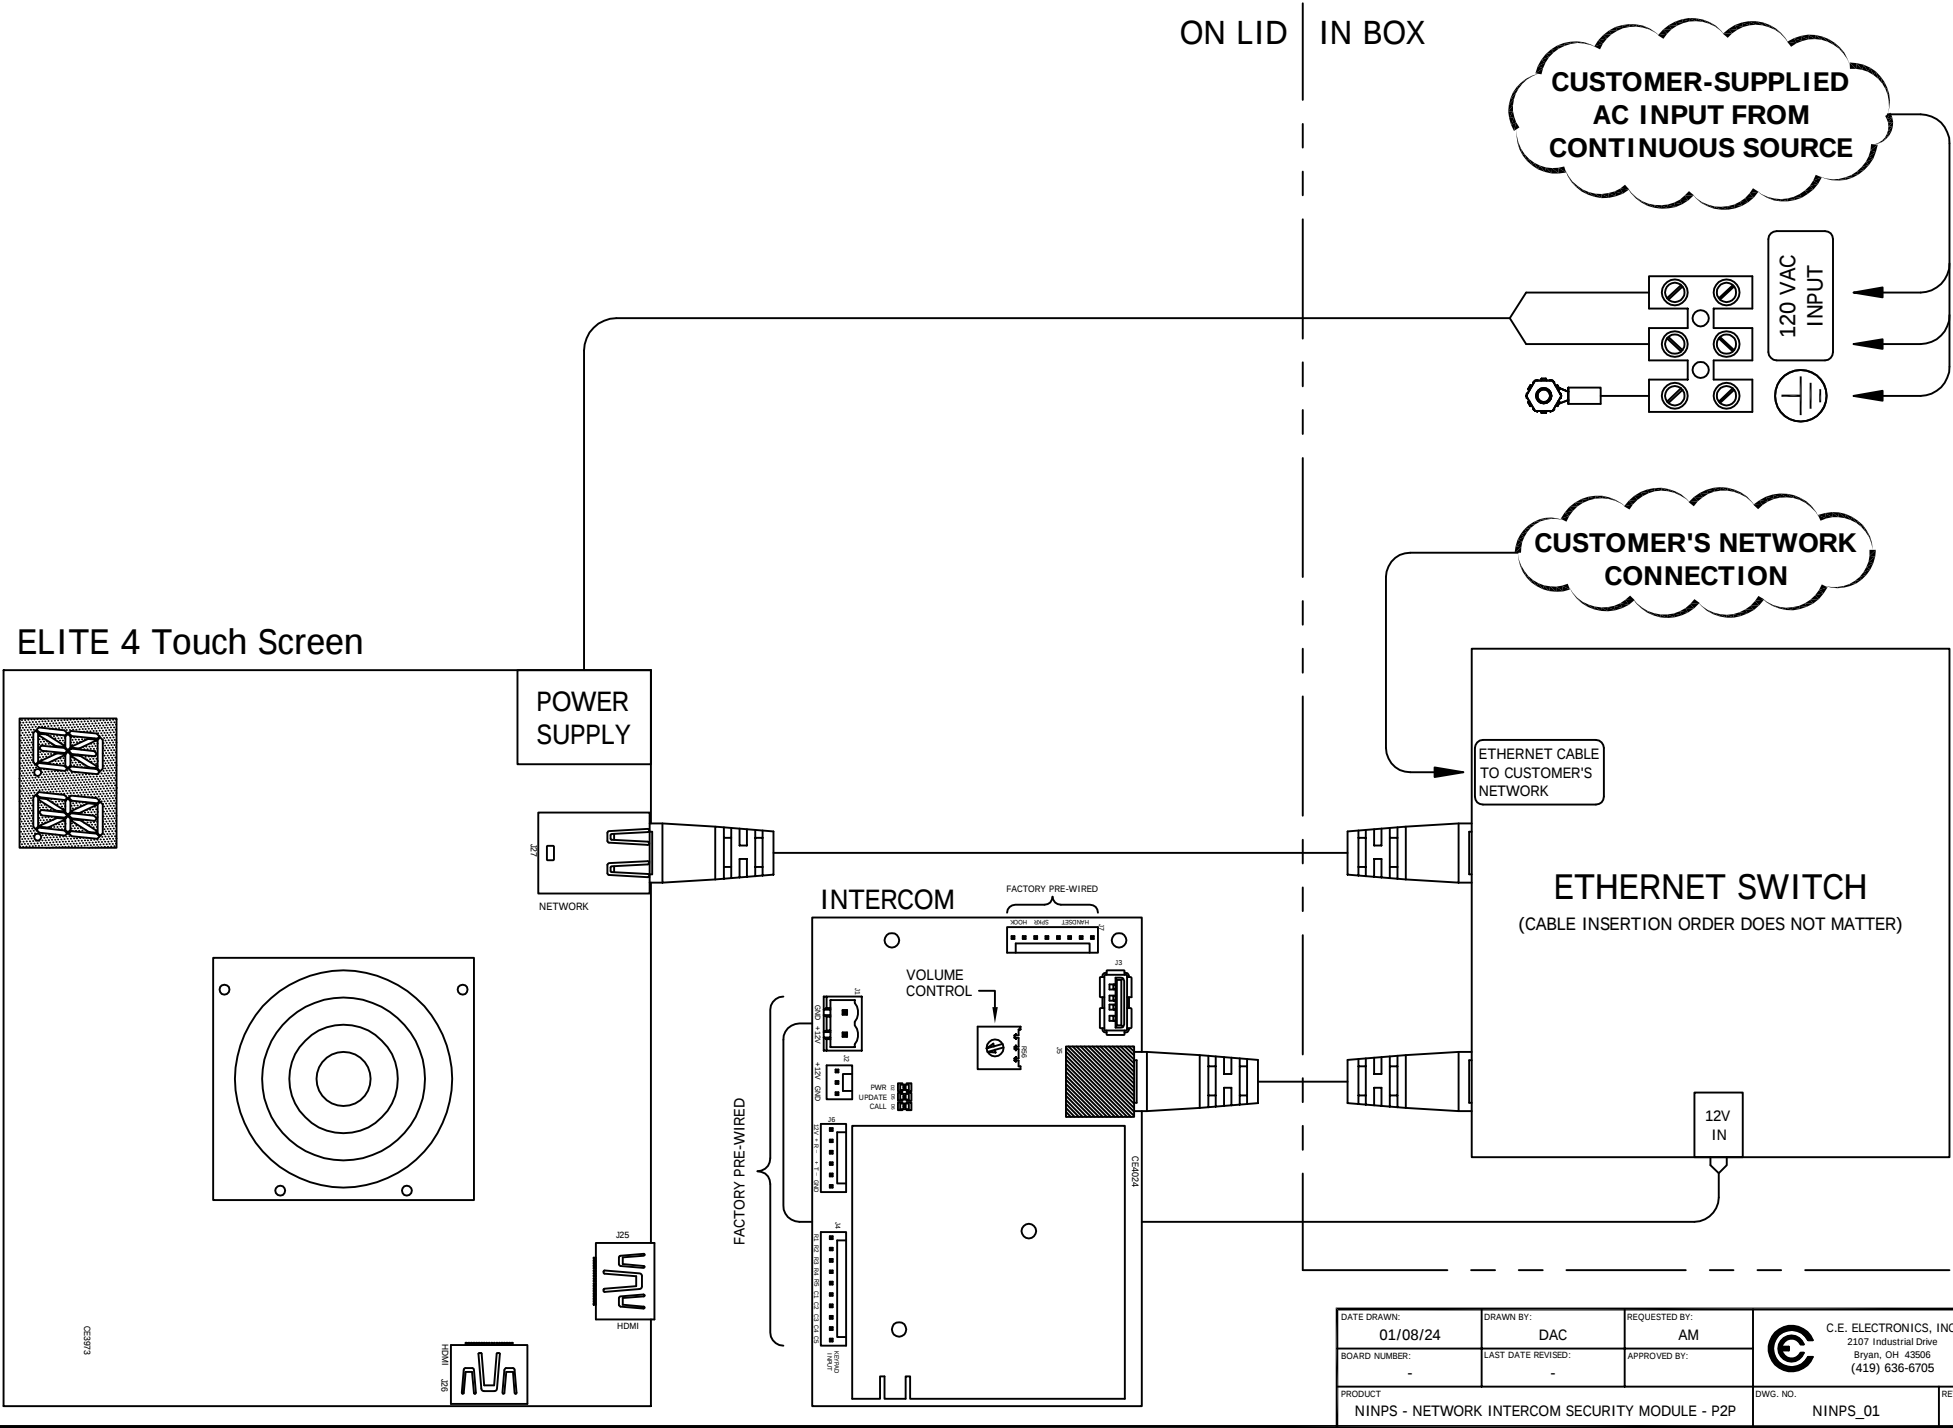

DATE DRAWN: 01/08/24	DRAWN BY: DAC	REQUESTED BY: AM	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, OH 43506 (419) 636-6705
BOARD NUMBER: -	LAST DATE REVISED: -	APPROVED BY:	
PRODUCT NINPS - NETWORK INTERCOM SECURITY MODULE - P2P			
DWG. NO. NINPS_01			REV: -