




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com

OEMS


Ver. 2 Rel. 8/22/2019

OTIS®
411 SERIES

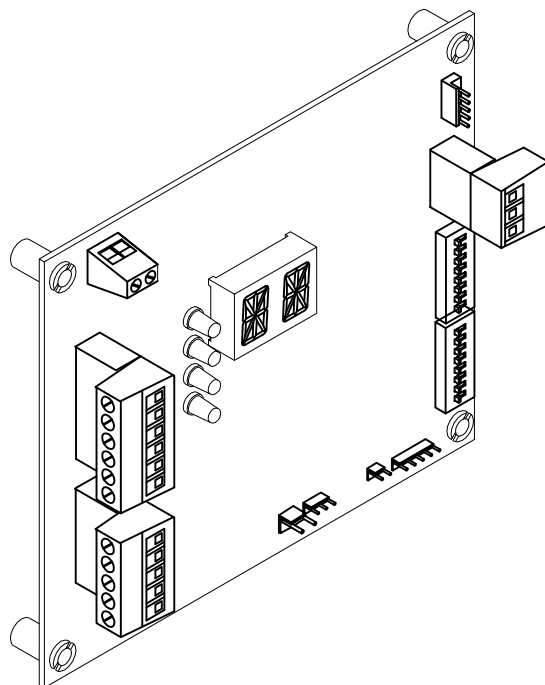


NOTE:

USE WITH OTIS 411 STYLE
CONTROLLER INTERFACES TO
THE CAR DATA LINK UNIT WIRES
LIKE A RS5 CARD. AND TAKES
SIGNALS FROM THE EMS LINK

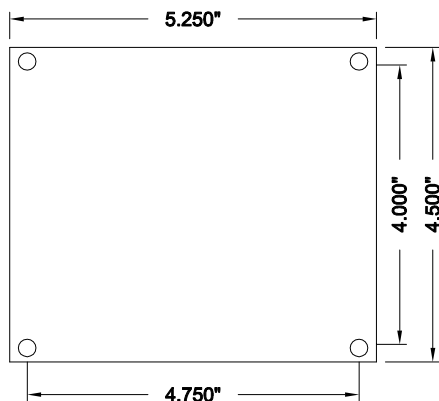

MINIMUM DEPTH
REQUIRED: 1.375"

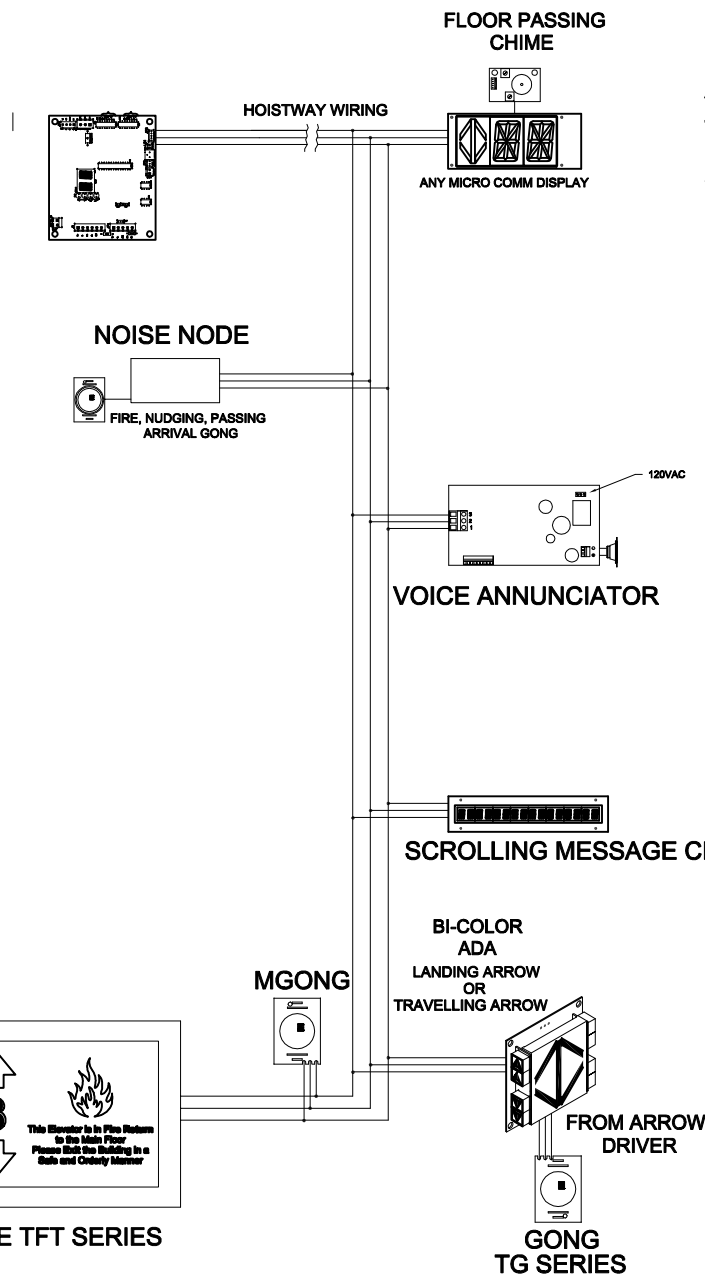

OEMS

OTIS INTERFACE CARD

A highly reliable, solid state interface card for Otis controllers. This card allows you to interface almost any Micro Comm display, voice module, and scrolling message module, directly to Otis 411 style controllers. This link also interfaces to the EMS communication link.

Features:


- 1 year factory warranty
- Conforms to ADAAG 4.10.4
- Includes gong
- Utilizes Micro Comm Displays
- Works Directly from Otis Controllers

TO ORDER - SPECIFY OEMS-X

OEMS

JOB# _____

OPTIONAL INPUT
VOLTAGE (<35 VDC)

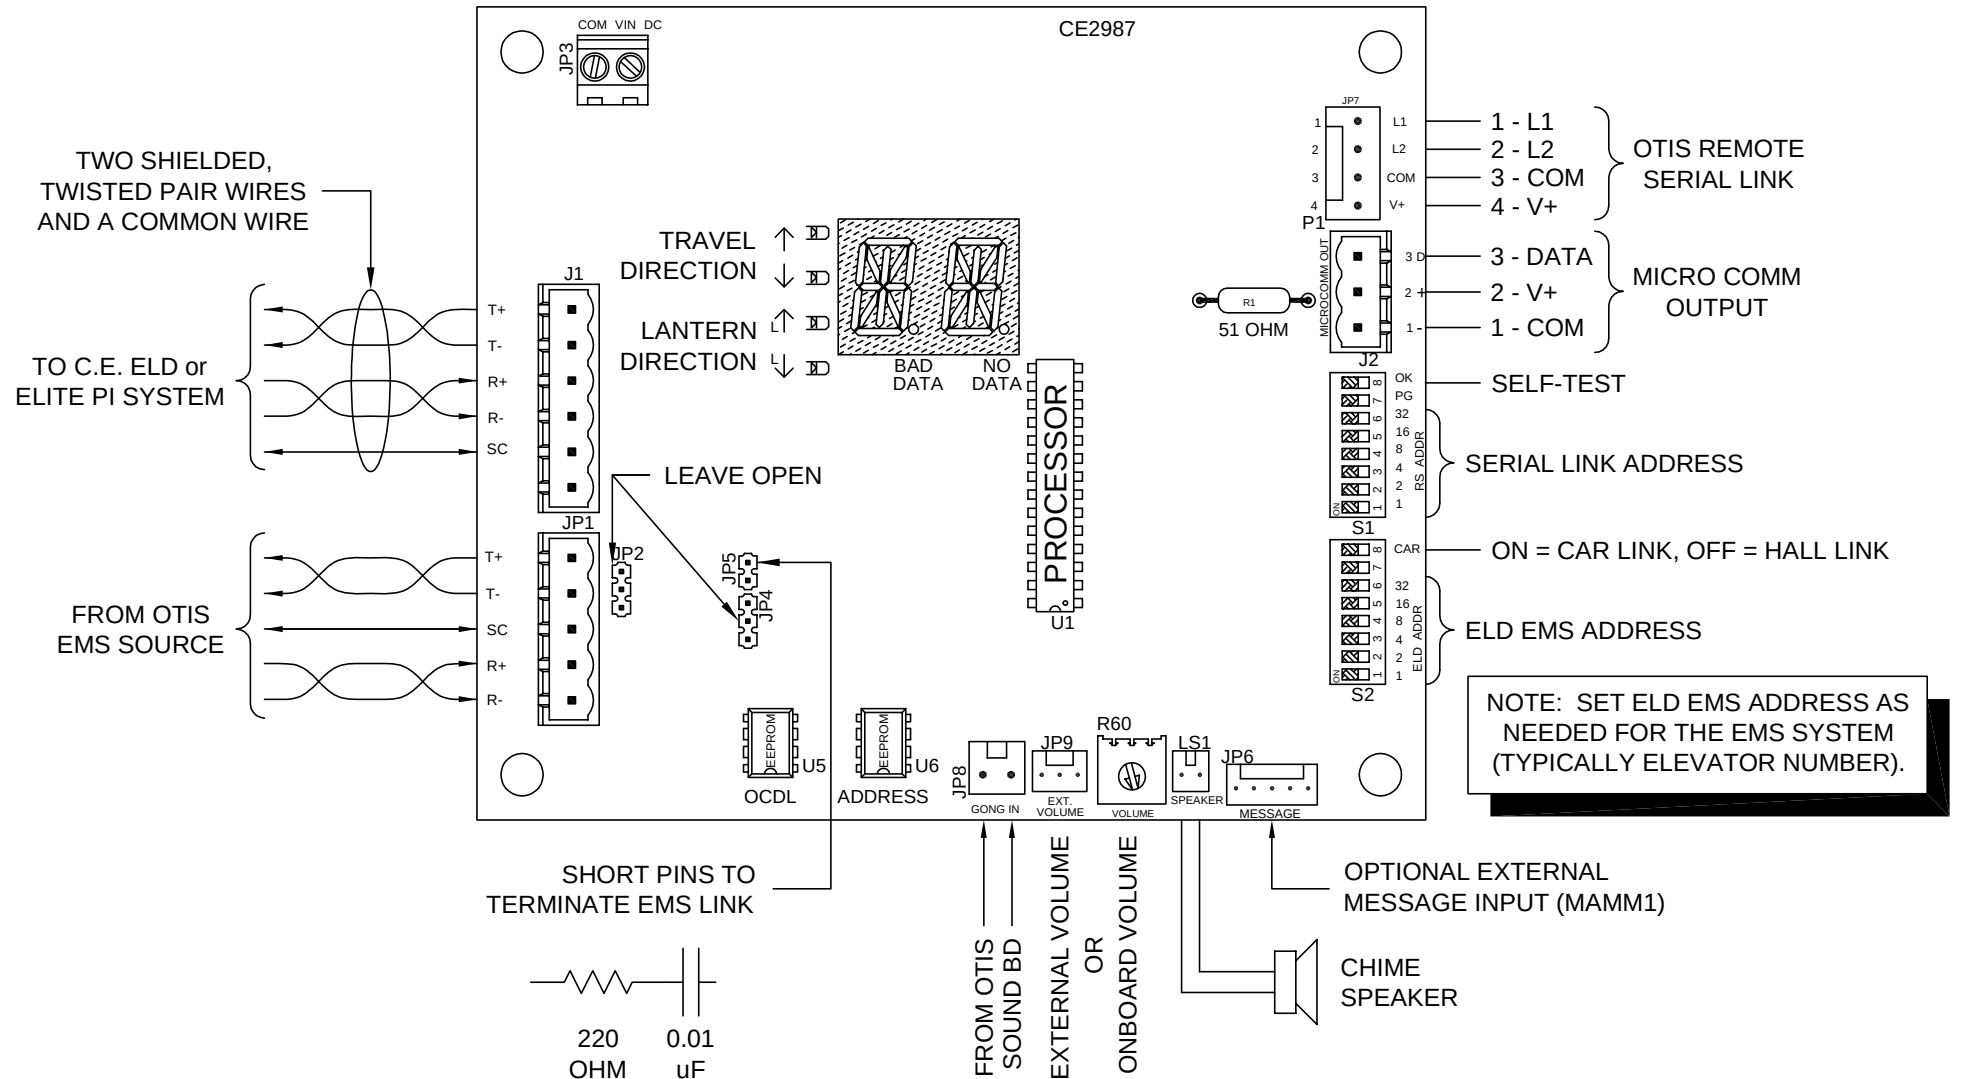

OEMS Default Settings*

Car Defaults

12-1	Command Channel
12-2	Command Channel
12-3	Command Channel
12-4	Command Channel
13-1	Data Channel
13-2	Data Channel
13-3	Data Channel
13-4	Data Channel
14-1	Odd Floors Being Served
14-2	Even Floors Being Served
14-3	All Floors Being Served
14-4	Lower Deck Being Served
15-1	Upper Deck Being Served
15-2	UP Arrow
15-3	DOWN Arrow
15-4	Overloaded Car
17-1	Please Exit the Car
17-2	Emergency Hospital Service
17-3	Restricted Floor
17-4	Further Demand
18-1	Display Control
18-2	Display Control
18-3	Priority Service
18-4	nc
50-1	FDO Front Door Open
50-2	RDO Rear Door Open
50-3	nc
50-4	LPT Passing Chime
51-1	nc
51-2	nc
51-3	CUML Travel UP
51-4	CDML Travel DOWN
52-1	FSL Fire Service Lamp
52-2	Message Two
52-3	Nudging
52-4	INCL Independent Service
53-1	OLS Car Overload Lamp
53-2	Message Six
53-3	Message Seven
53-4	Message Eight
54-1	nc
54-2	nc
54-3	CDLU Hall Lantern UP
54-4	CDLD Hall Lantern DOWN
55-1	nc
55-2	nc
55-3	RCDLU Rear Hall Lantern UP
55-4	RCDLD Rear Hall Lantern DN

If an EEPROM is not installed in U6, turn on DIP switch eight on S2 for car unit. The setting in the U6 EEPROM overrides S2-8.

Hall Defaults

OI-1 ¹	ECA
OI-2¹	Chime
OI-3¹	UP Lantern
OI-4¹	DOWN Lantern
17-1	nc
17-2	nc
17-3	nc
17-4	nc
50-1	Fire Service
50-2	nc
50-3	nc
50-4	nc
57-1	Command Channel
57-2	Command Channel
57-3	Command Channel
57-4	Command Channel
58-1	Data Channel
58-2	Data Channel
58-3	Data Channel
58-4	Data Channel
59-1	nc
59-2	DOWN Arrow
59-3	UP Arrow
59-4	nc
²	FDO Front Door Open
²	RDO Rear Door Open
²	LPT Passing Chime
²	CUML Travel UP
²	CDML Travel DOWN
²	FSL Fire Service Lamp
²	Message Two
²	INCL Independent Service
²	OLS Car Overload Lamp
²	Message Six
²	Message Seven
²	Message Eight
²	CDLU Hall Lantern UP
²	CDLD Hall Lantern Down
²	RCDLU Rear Hall Lantern UP
²	RCDLD Rear Hall Lantern DOWN

If an EEPROM is not installed in U6, turn off DIP switch eight on S2 for hall unit. The setting in the U6 EEPROM overrides S2-8.

Indented data bits are not used by the default OEMS interface program.

¹ OI address is set by using S1-1 through S1-6 in Hall Mode (S2-8 is off).

² These bits are read by the OEMS when the U6 EEPROM is installed.

*If the U6 EEPROM (created using ELDBurner.exe) is used, the data bits can be programmed at any address/data bit location.