




C.E. Electronics, Inc.  
 2107 Industrial Drive  
 Bryan, OH 43506  
 PH (419) 636-6705 FX (419) 636-2516  
 www.ceelectronics.com

# MSV20-XXXX

Ver. 4 Rel. 6/11/09

ACCESSORIES

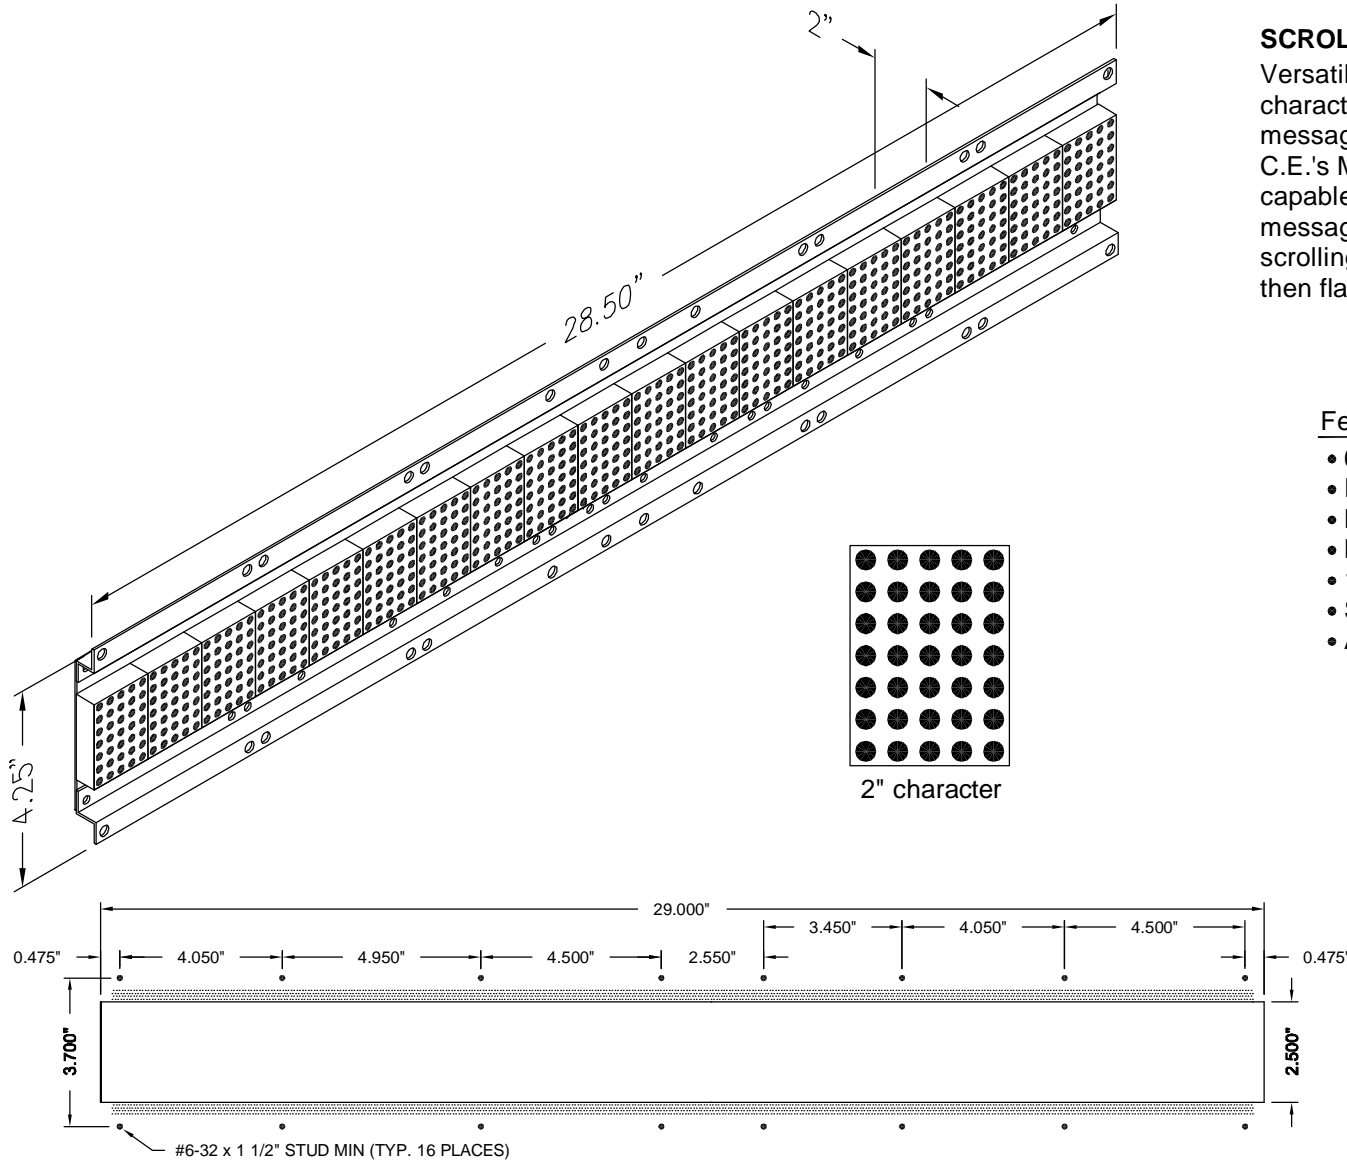

## SCROLLING MESSAGE DISPLAY

Versatile scrolling message displays any alphanumeric character within a 2 inch LED 16 digit screen. Various messages can be selected via binary inputs or through C.E.'s Micro Comm 3 wire network. The display is capable of 63 different messages (119 characters per message max). The display is capable of continuous scrolling or can be programmed to scroll in and stop then flash.

### Features:

- 63 messages
- Flashing
- Binary inputs
- Micro Comm inputs
- 10-150VAC/DC inputs
- Scroll in, scroll out
- Adjustable continuous scrolling rate

### TO ORDER:-SPECIFY MSV20 - X X X X

COLOR:  
 "R" = RED  
 "A" = AMBER  
 "G" = GREEN

SIGNAL VOLTAGE:  
 "A" = POSITIVE 6-20VAC/DC, 24 VAC  
 "B" = POSITIVE 24-48VDC, 48VAC  
 "C" = POSITIVE 120VAC  
 "D" = POSITIVE 125VDC  
 "E" = NEGATIVE 6-20VDC  
 "F" = NEGATIVE 24-48VDC  
 "G" = NEGATIVE 125VDC  
 "M" = MICRO COMM

SIGNAL FORMAT:  
 "1" = SINGLE LINE/FLOOR \*  
 "2" = BINARY  
 "3" = UNITS & TENS \*  
 "4" = GRAY CODE  
 "5" = INVERTED BINARY  
 "6" = SPECIAL  
 "M" = MICRO COMM

LENS:  
 "R" = RED  
 "G" = GRAY  
 "X" = NO LENS

\* MAY NEED ADDITIONAL DECODER CARD  
 \* REMOTE POWER SUPPLY

### NOTE:

1. If a special voltage is required, please consult factory.
2. To display time, date, or temperature, must purchase as a system which includes MTIME-X and MPROG module. A computer interface is optional.

### RENEWAL PARTS

Lens: 104-5649 RED  
 Lens: 104-6099 GRAY